

# Satellite Observations

**Mohamed Dahoui**

**Mohamed.Dahoui@ecmwf.int**

**Office 160 Phone +44-118-9499 043**

- ① Data sources
- ② Why satellite data important ?
- ③ Principals of satellite measurements
- ④ Satellite data usage
- ⑤ Monitoring of satellite data

## ① Data sources

② Why satellite data important ?

③ Principals of satellite measurements

④ Satellite data usage

⑤ Monitoring of satellite data

### SYNOP/SHIP/METAR:

→ temperature, dew-point temperature, wind (land: 2m, ships: 25m)

### BUOYS:

→ temperature, pressure, wind

### TEMP/TEMPSHIP/DROPSONDES:


→ temperature, humidity, pressure, wind *profiles*

### PROFILERS:


→ wind *profiles*

### Aircraft:


→ temperature, pressure, wind *profiles*

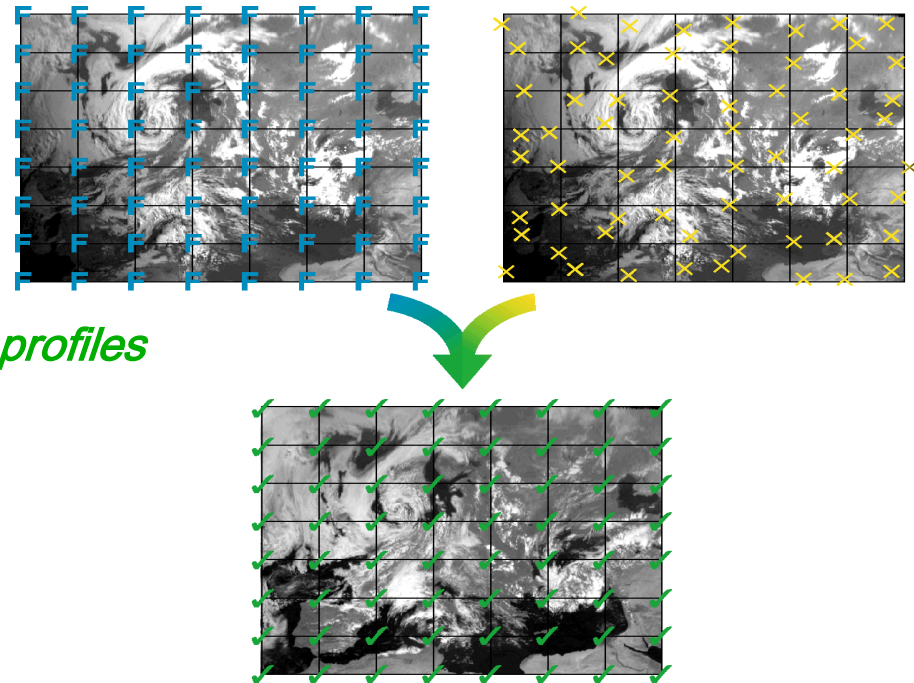


# Example of conventional data coverage (one month)

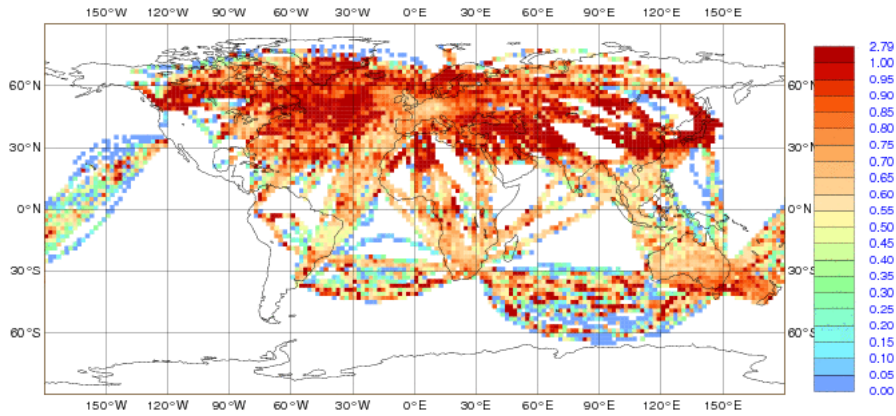


Aircraft - AMDAR

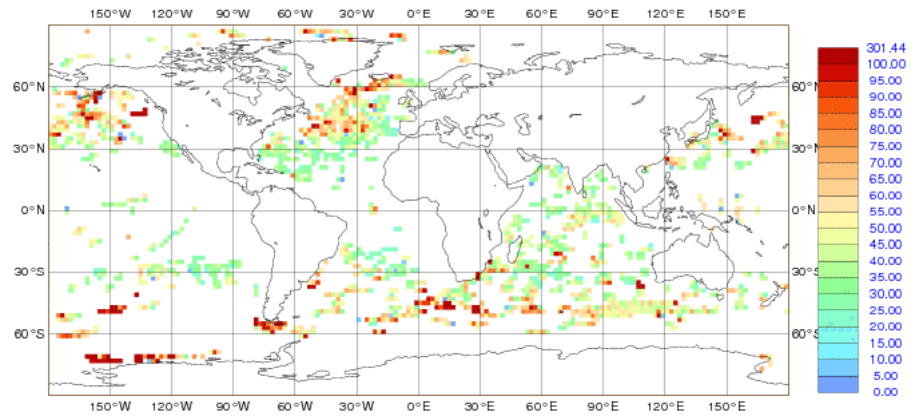

Buoy






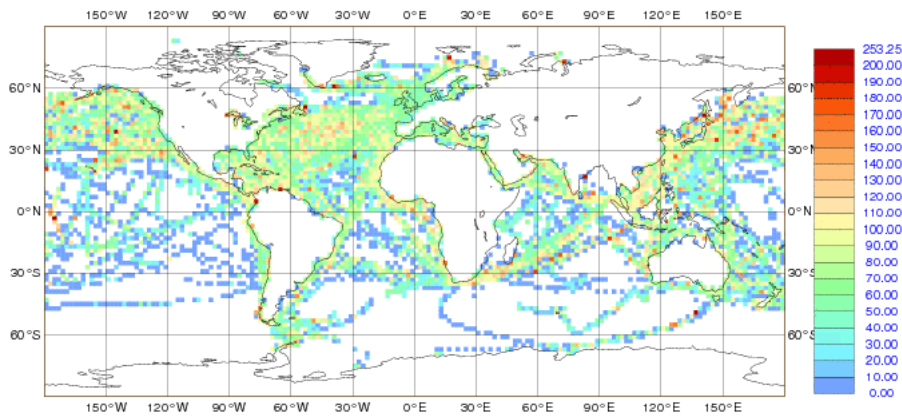


Synop - ship

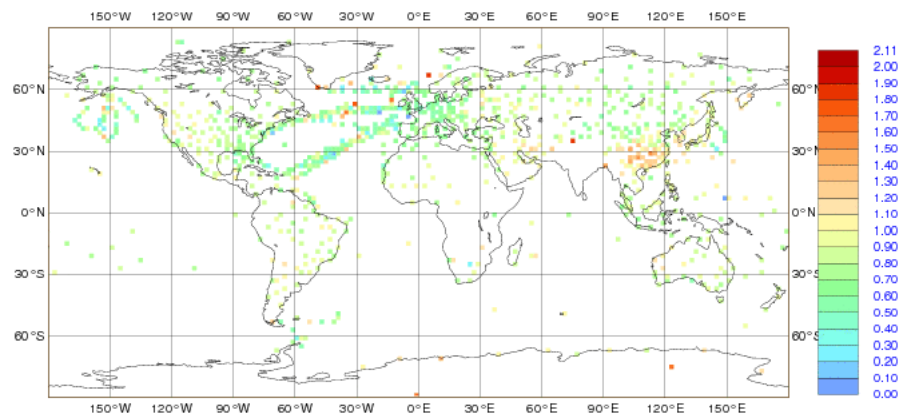



Temp

# Example of 6-hourly satellite data coverage

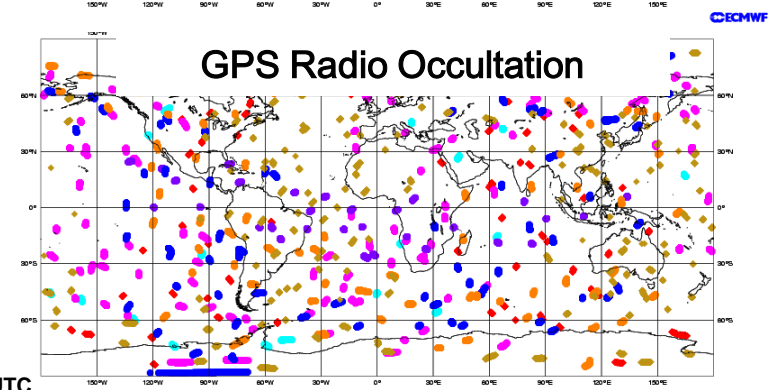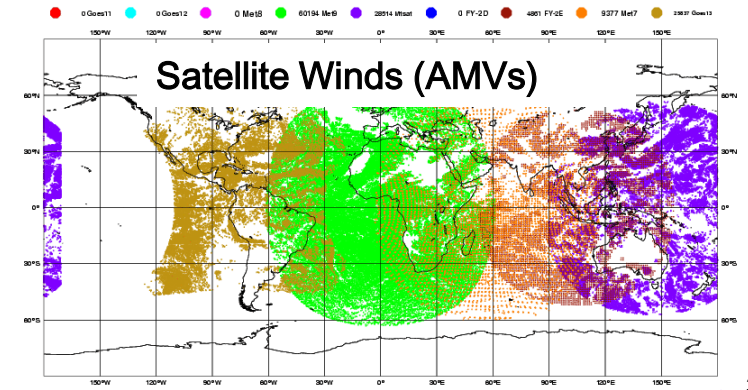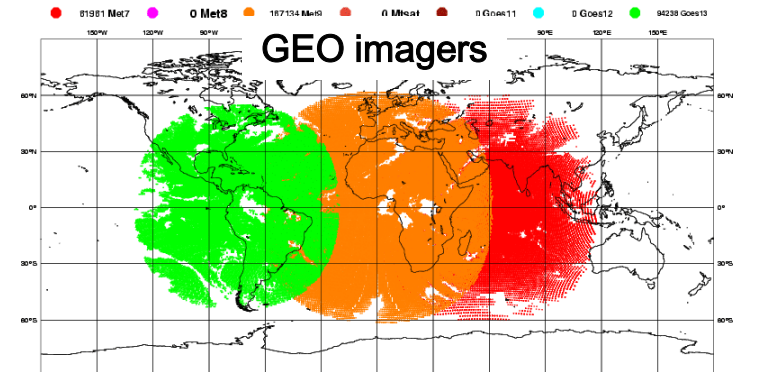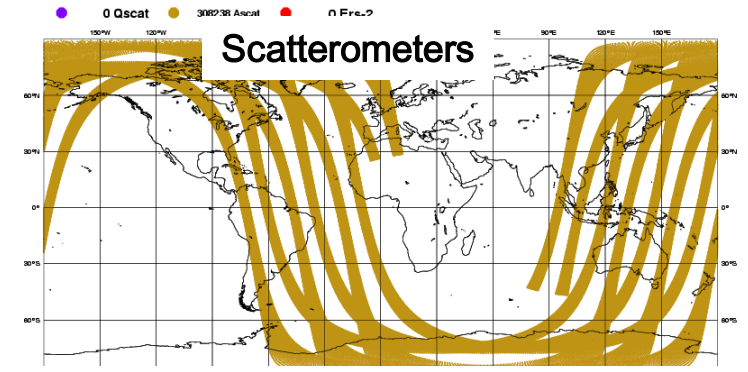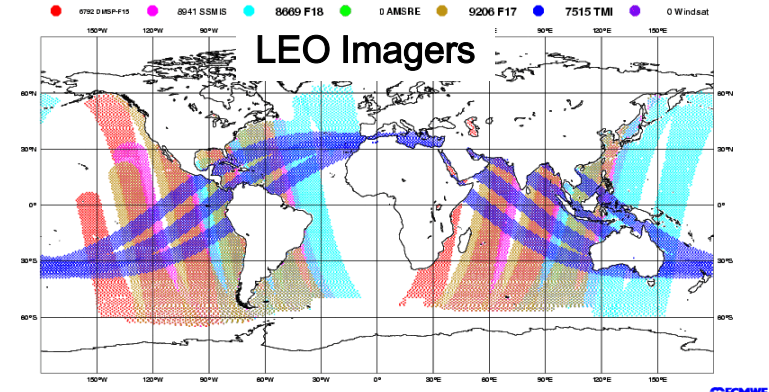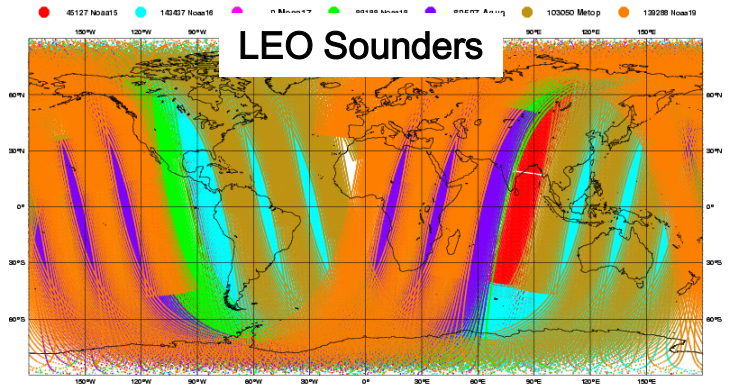

30 March 2012 00 UTC

# Number of used satellite data is increasing

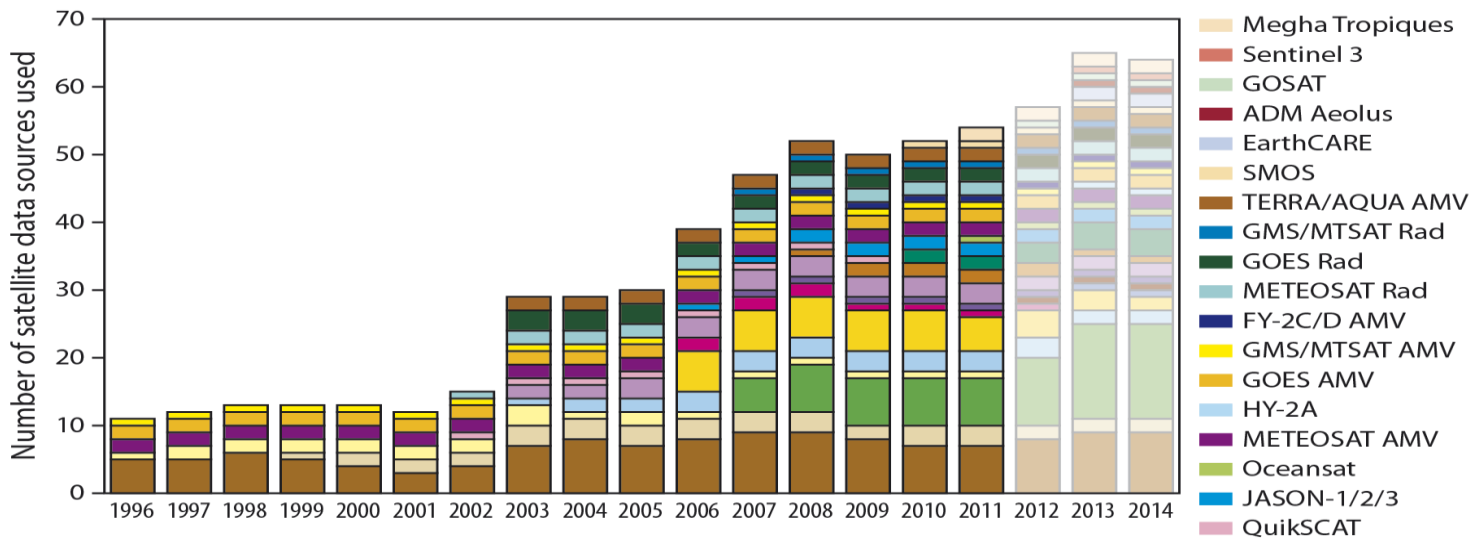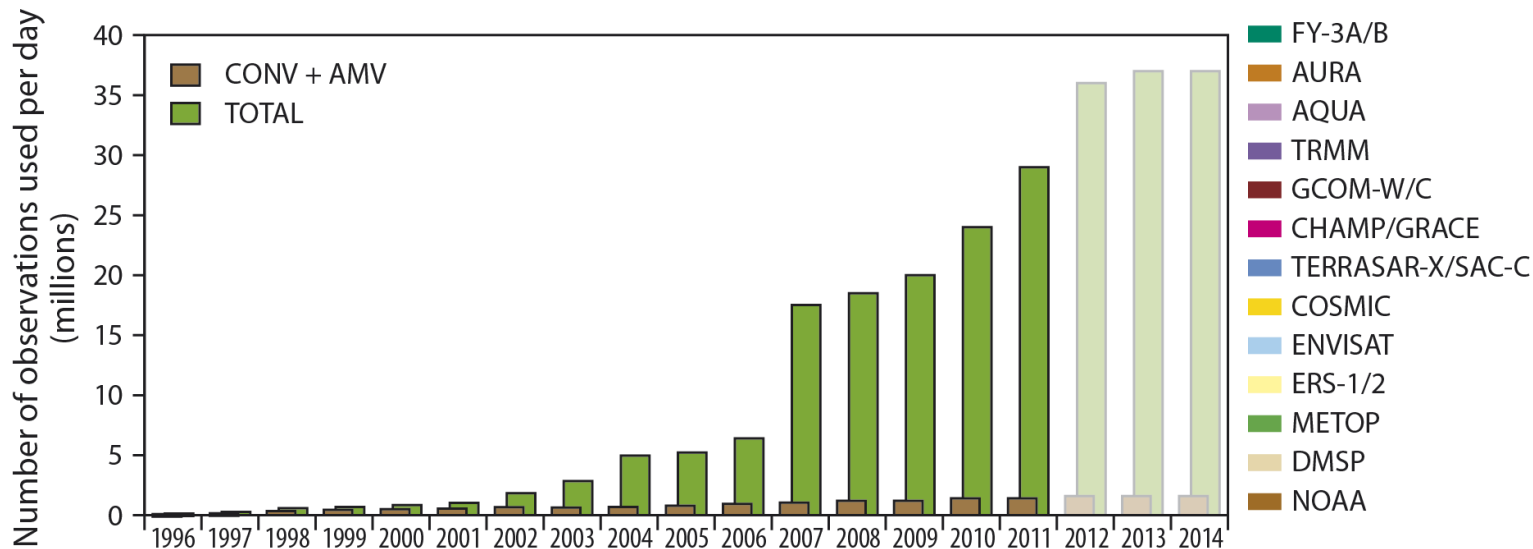


A scientific and technical challenge

- ① Overview of data sources
- ② Why satellite data important ?**
- ③ Principals of satellite measurements
- ④ Satellite data usage at NWP
- ⑤ Monitoring of satellite data





- **global coverage** with a high spatial and temporal resolution,
- Vital for less observed regions (oceans, deserts),
- Consistent positive impact everywhere
  - ✓ Capacity to correct **small-amplitude large scale** errors

### Anomaly correlation of 500hPa height for northern hemisphere

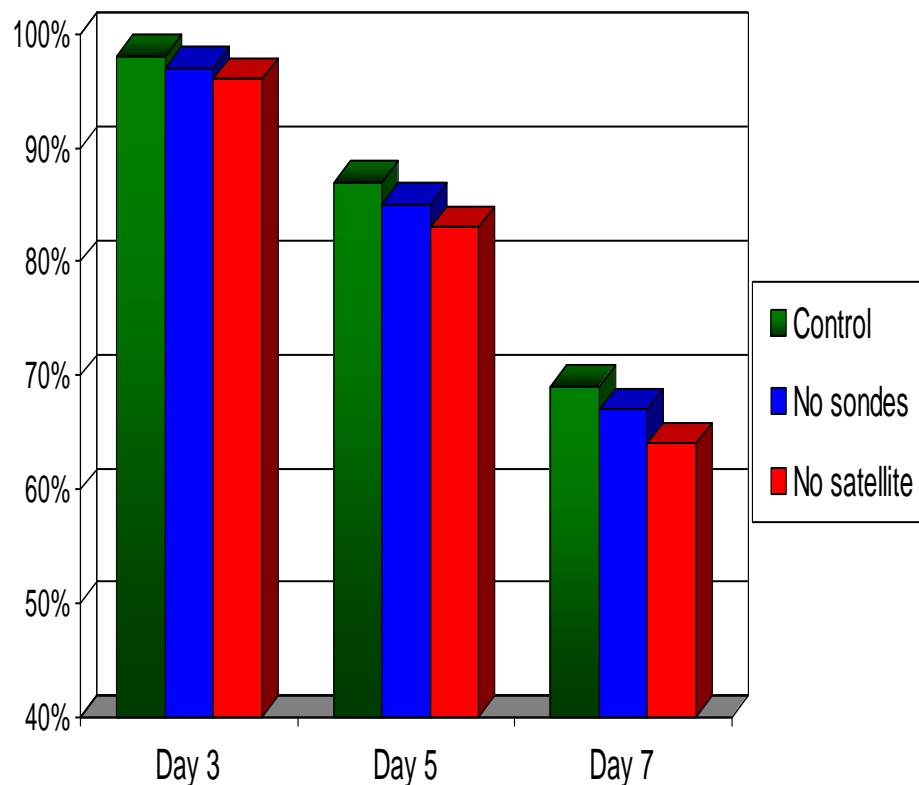


### Anomaly correlation of 500hPa height for southern hemisphere

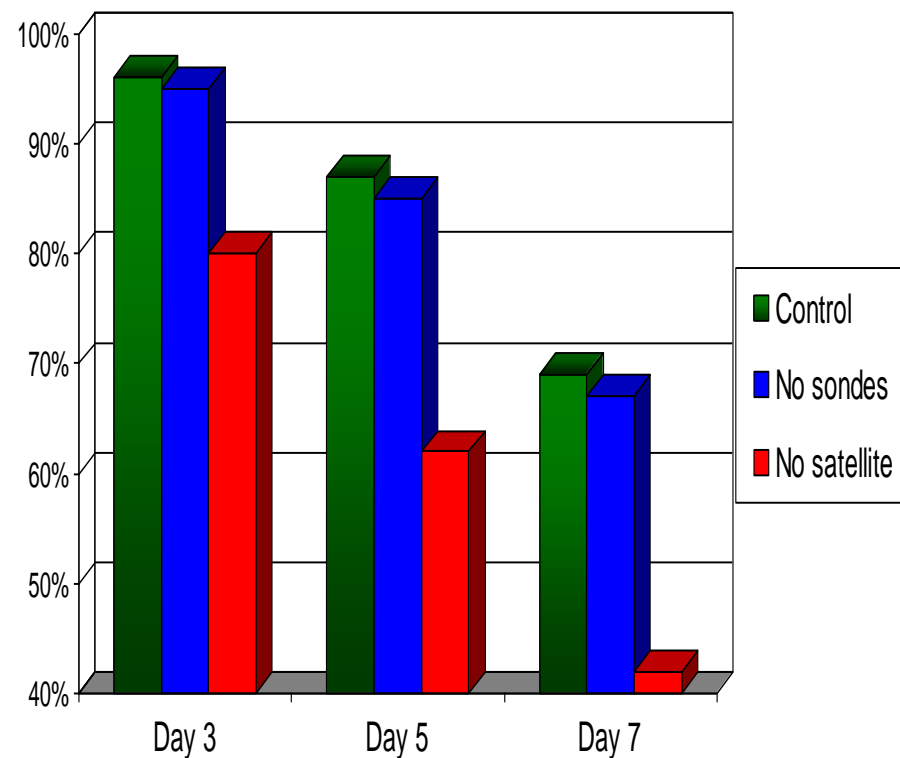

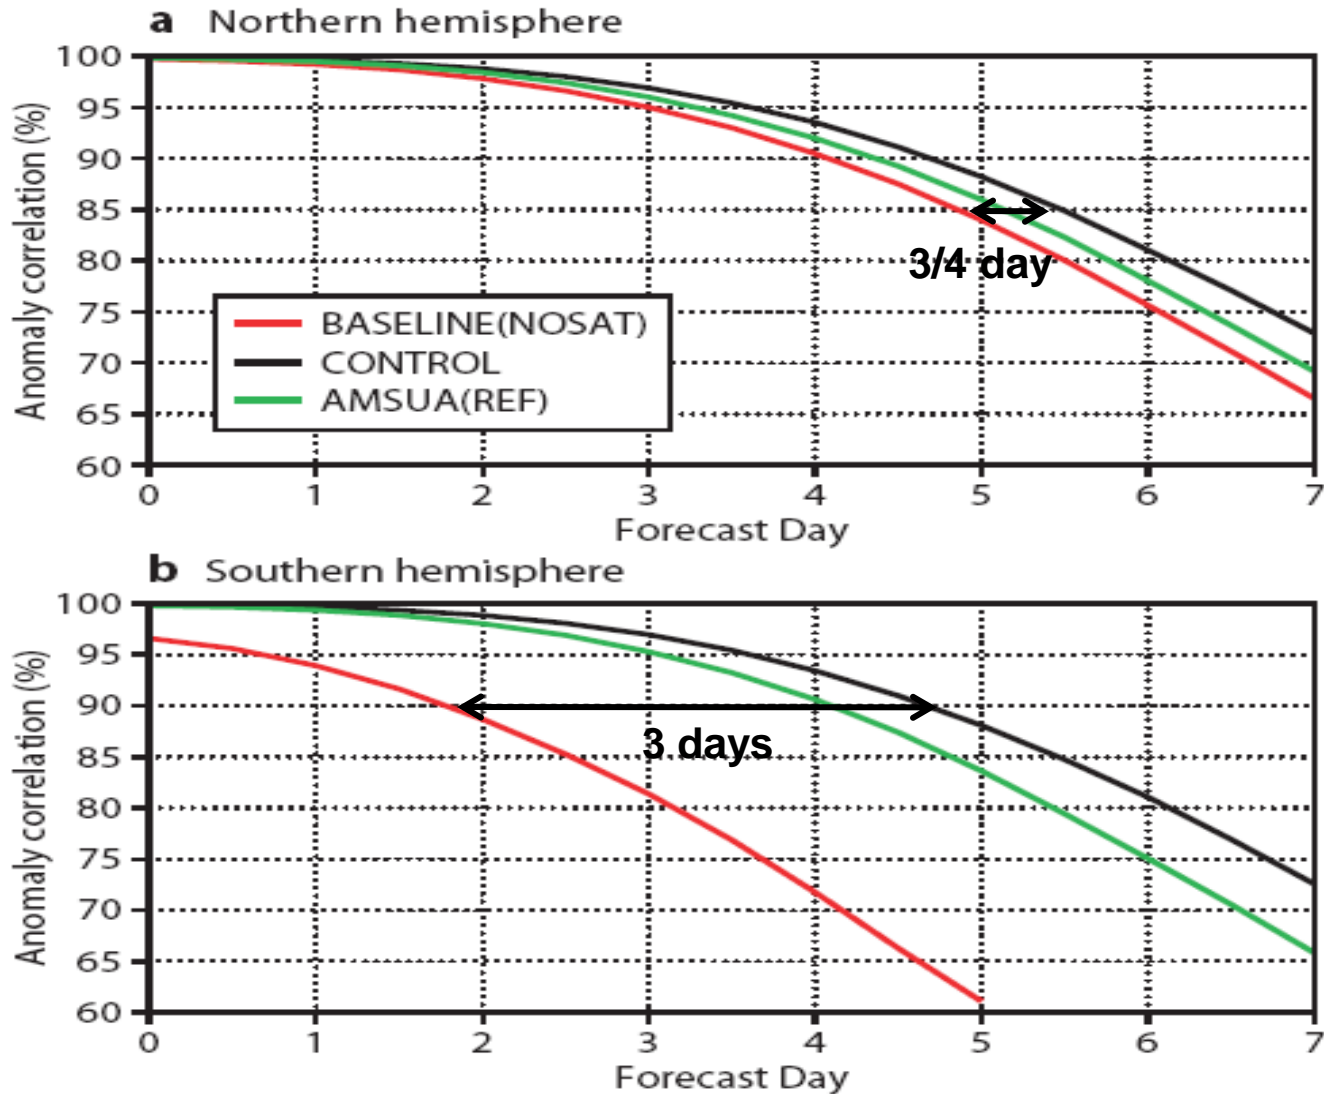

- ① Overview of data sources
- ② Why satellite data important
- ③ Principals of satellite measurements**
- ④ Satellite data usage at NWP
- ⑤ Monitoring of satellite data


- Geostationary satellites
- Low Orbiting satellites (LEO)

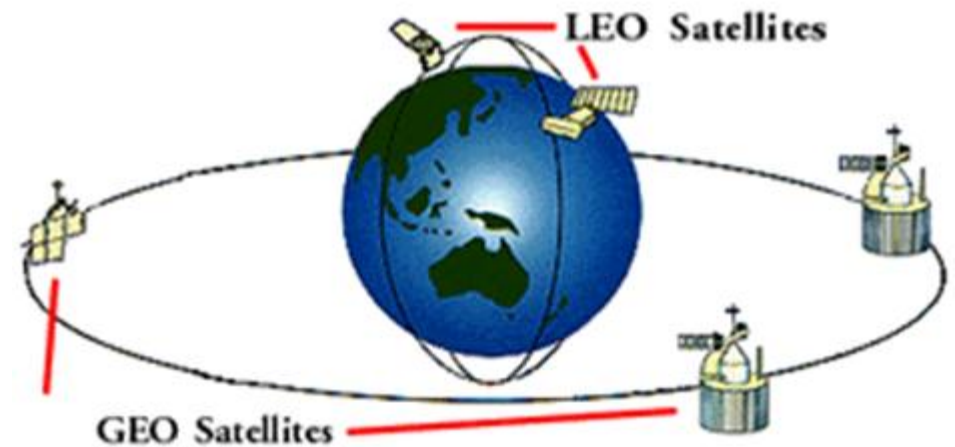


- Orbits in earth's equatorial plan at heights of 36.000 Km,

- Satellites are stationary with respect to a point on the earth's surface,


- Wide coverage and high spatial and temporal resolution (now-casting and short range forecasting, diurnal phenomena and feature tracking),

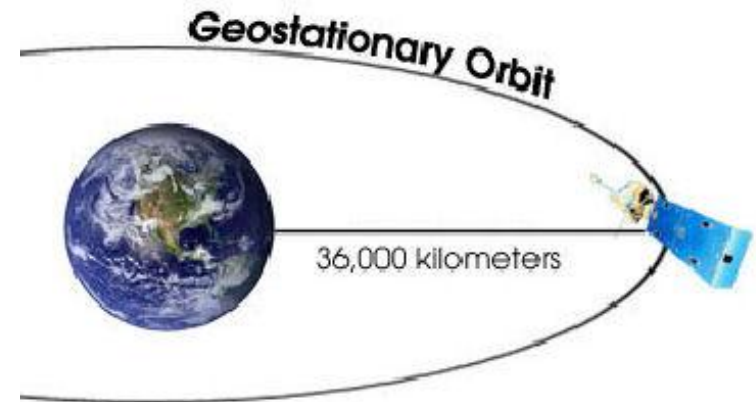

- Due to the high satellite altitude, some important parts of the EM spectrum cannot be observed (e.g microwave part) and channels are generally broad (the signal is weak),
- Necessity of a constellation of satellites to cover the whole globe,
- Unsuitable to observe polar regions.

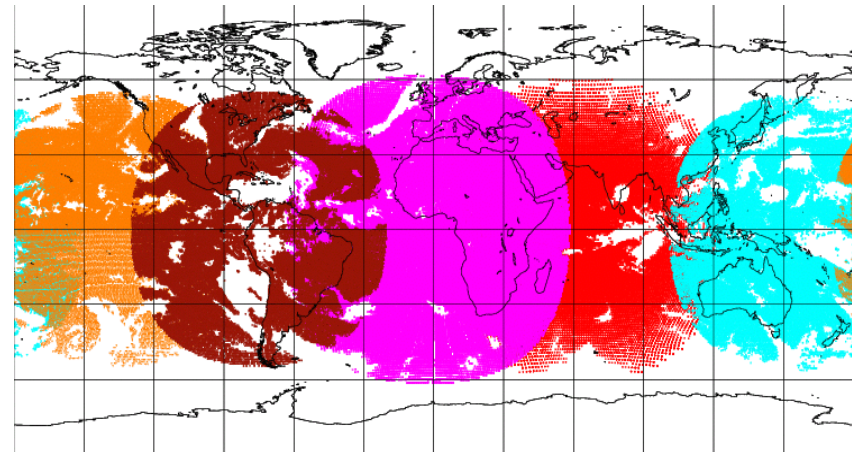

- Orbits at heights between 400 and 850 Km
- Orbits are circular and pass (nearly) over the poles.
- Each satellite completes around 14 orbits in one day (period between 98 and 102 min). Imagery from successive orbits overlay with each other to give global daily coverage.

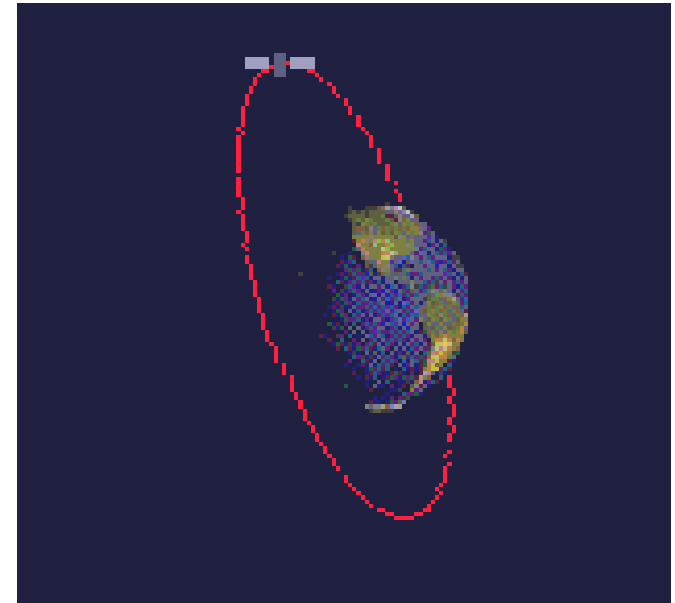




- Due to the low height of satellites :
  - All the meteorologically useful electromagnetic spectrum can be covered (including microwave spectrum),
  - High spectral resolution measurements can be achieved (the noise remains less important than the real signal),
  - High spatial resolution
  - Active measurements can be achieved (with radars and lidars ).
  
- Moderate temporal sampling → not useful for now casting.

Satellite instruments do not measure directly geophysical atmospheric parameters (Temperature, Humidity, Ozone, Wind, ...)


Satellite instruments measure the electromagnetic radiation that reaches the top of the atmosphere at certain **frequencies**

Measured radiance is related to geophysical atmospheric parameters by the **radiative transfer equation**

## THE ELECTROMAGNETIC SPECTRUM

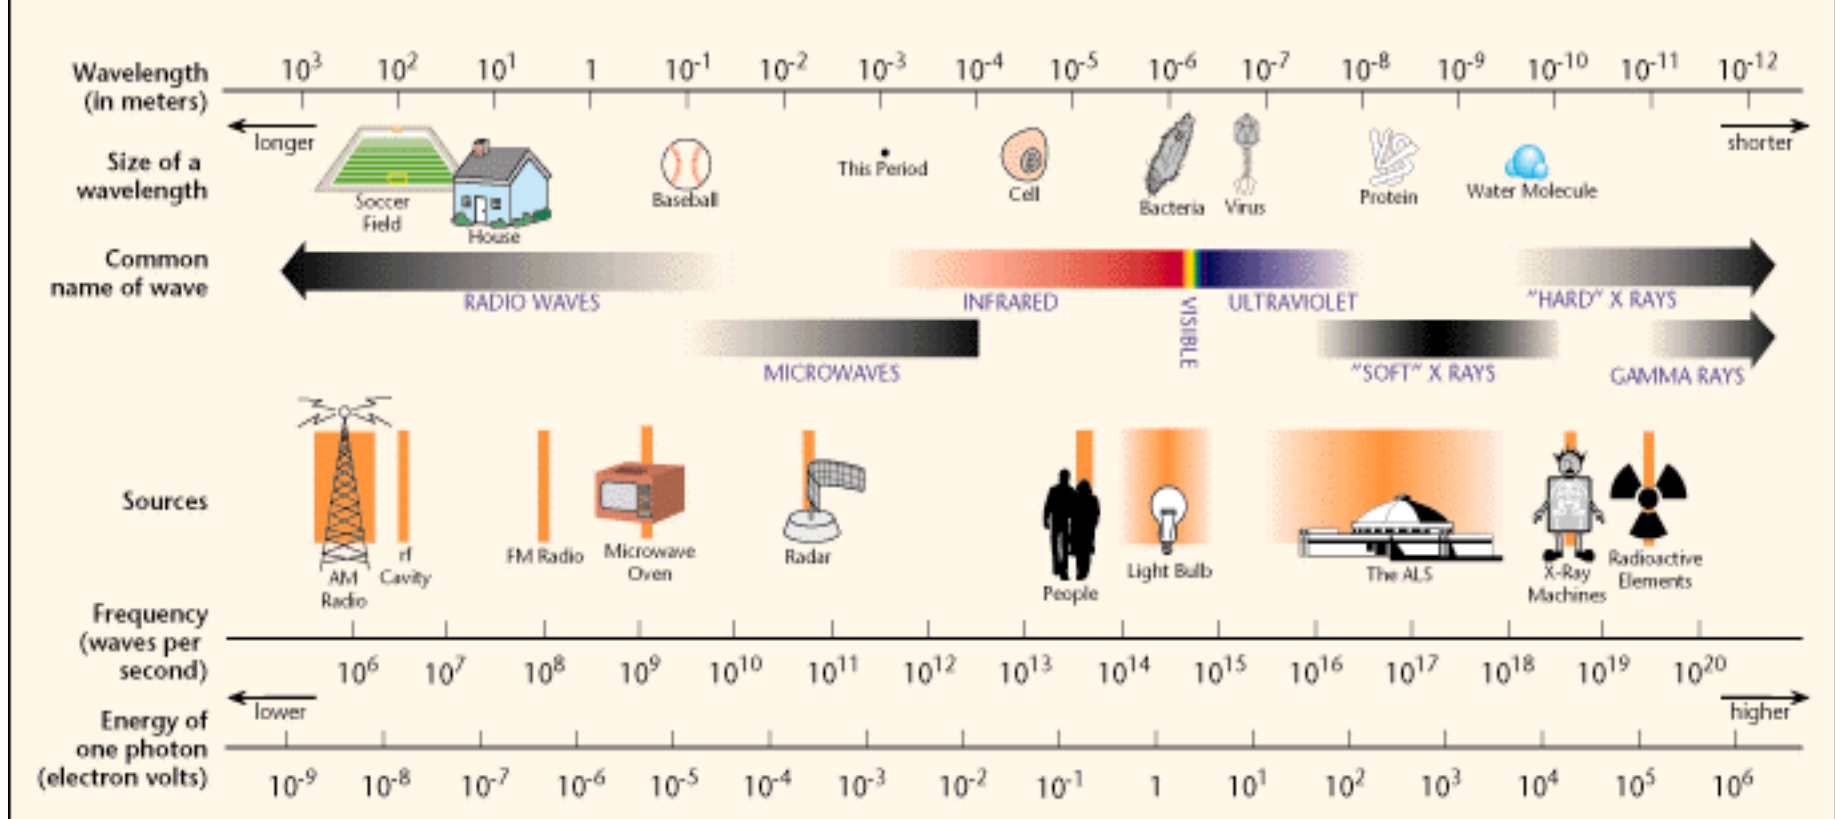


Depending on the frequency, atmospheric gases either **absorb** the electromagnetic radiation or let it **transmit** freely.

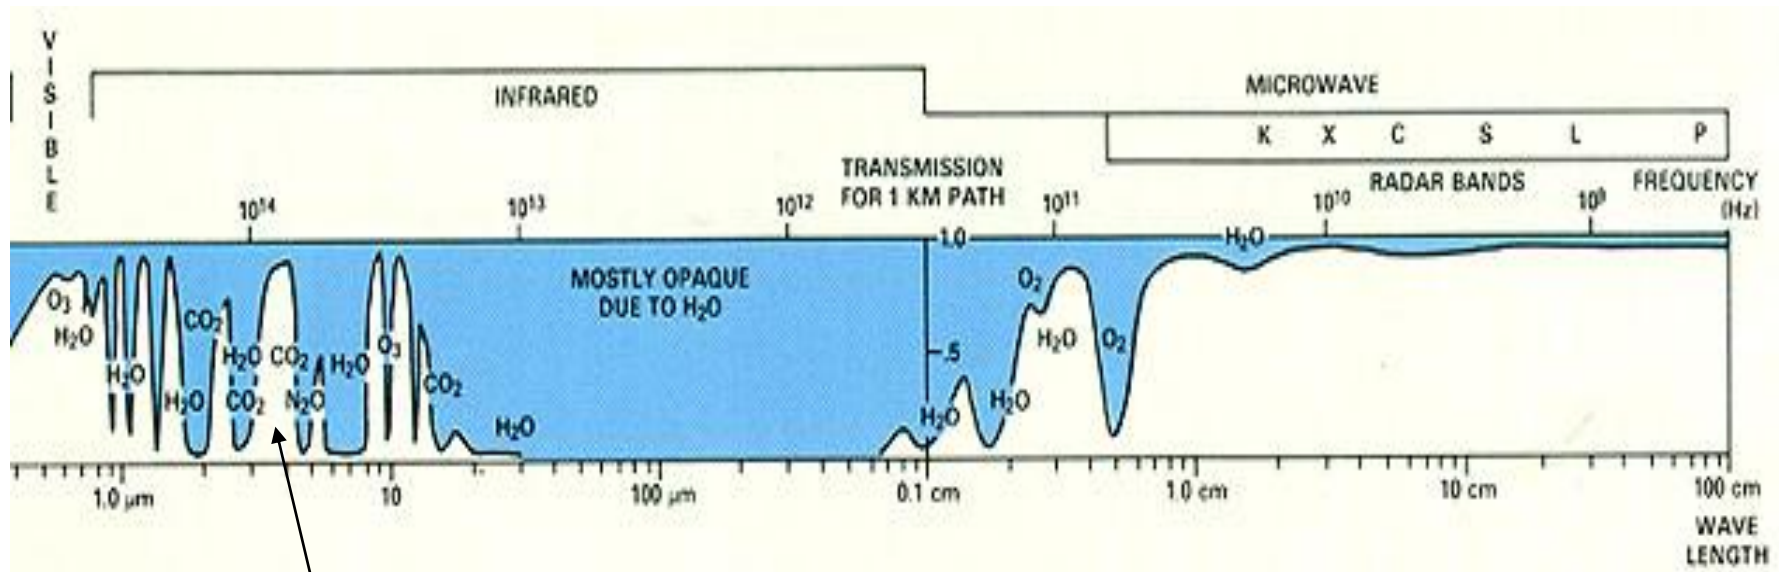

**Atmospheric Windows**

The **radiance**  $L(\nu)$  that reaches the top of the atmosphere at a certain **frequency**  $\nu$  is given by :

$$L_{\nu} = \int_0^{\infty} B(\nu, T(z)) \left[ \frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$

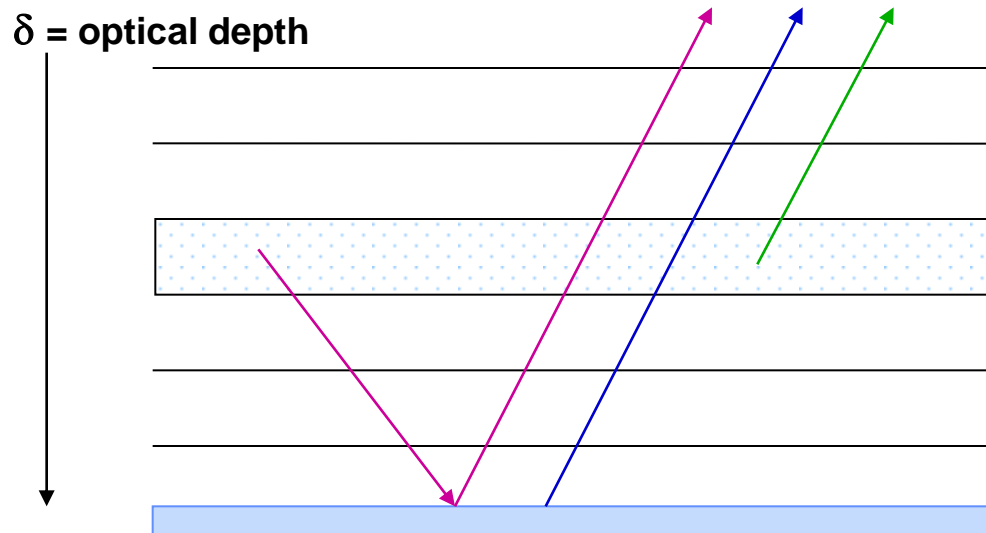

The measurement of geophysical properties of the surface and the atmosphere can be achieved using :

- **Atmospheric sounding/imaging** from **passive** instruments
  - **Surface** sensing from **passive** instruments
  - **Surface** sensing from **active** instruments
  - **Atmospheric sounding** by GPS Radio Occultation.
- } **Most sounding instruments**

└─→ **L1 data: raw data (after some minor pre-processing)**  
**L2 data: derived products**

- Mainly used to derive the vertical distribution of temperature, humidity and the concentration of other constituents affecting the transmittance.
- Located in parts of the infrared and microwave spectrum for which the main contribution to the measured radiance comes from the atmosphere gases. They avoid channels for which surface radiation is important.

$$L_\nu = \int_0^\infty B(\nu, T(z)) \left[ \frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$

The term  $\left[ \frac{d\tau(\nu)}{dz} \right]$  is circled in green in the original image. The terms "Surface emission" and "Surface reflection" are crossed out with red X's. The term "Cloud/Rain interaction" is written in red.

where: **B** = Planck function  
 **$\tau$**  = transmittance

**z** = height  
 **$\nu$**  = frequency

**T** = temperature

- To measure the temperature we need to select frequencies for which the absorption is due to gases with quasi-fixed and known concentration (like CO<sub>2</sub> and O<sub>2</sub>) →  $L(\nu)$  depends only on temperature,


e.g.      Microwave bands around 60 and 120 GHz  
             Infrared bands around 15  $\mu\text{m}$  and 4.3  $\mu\text{m}$

- To measure the humidity or ozone we need to select frequencies for which Water vapor or ozone are a potential absorbers.


e.g.      Infrared band near 6  $\mu\text{m}$  for humidity  
             Infrared band near 9  $\mu\text{m}$  for ozone



For a given frequency  $\nu$ , The weighting function  $K\nu(z)$  has his highest value in the atmospheric layer which contribute to the maximum of the outgoing radiance

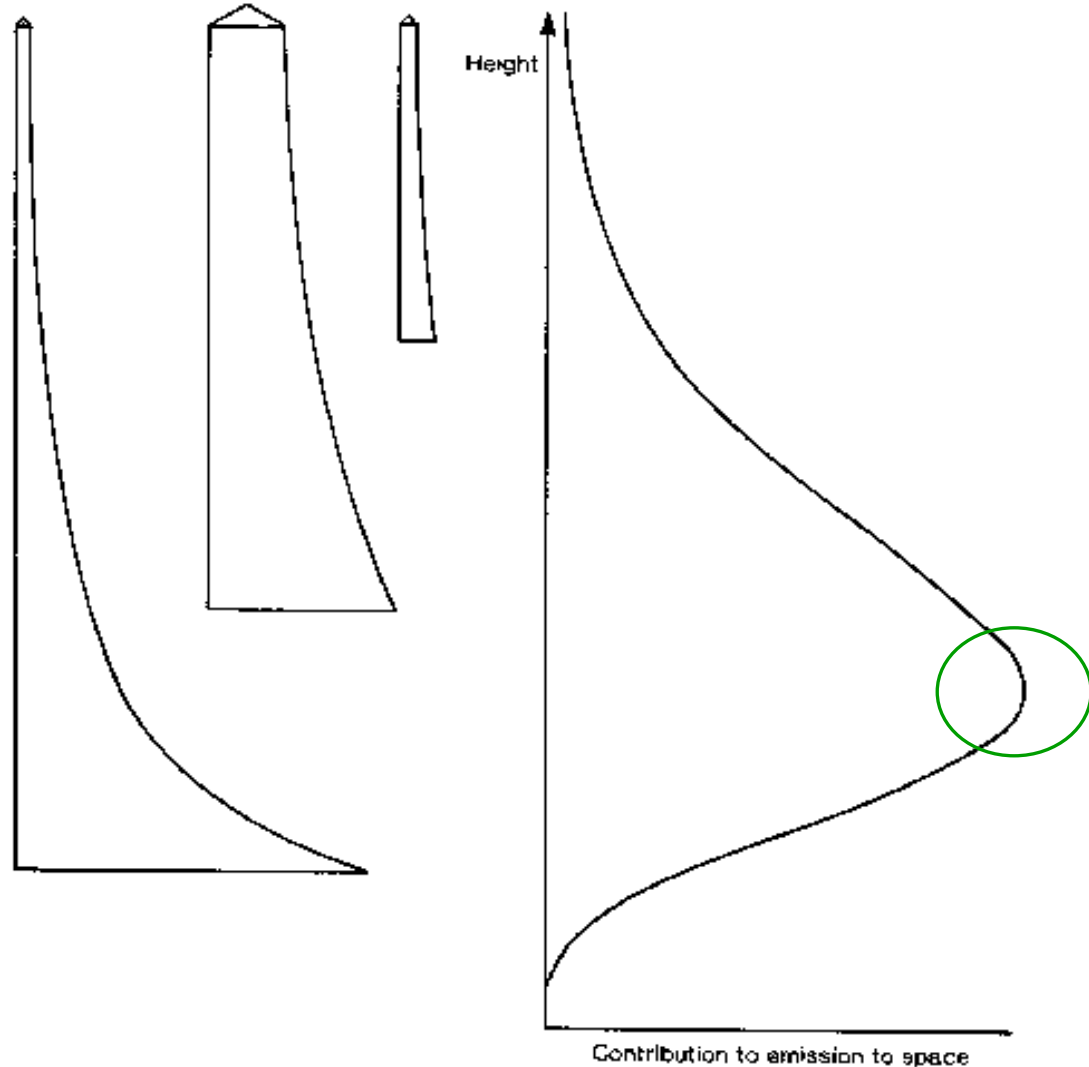

- With a careful selection of frequencies, one can derive atmospheric parameters at several layers
- The weighting functions are broad → limits the capacity to derive small scale properties in the vertical
- The weighting functions are highly overlapping → limits the sampling of the vertical

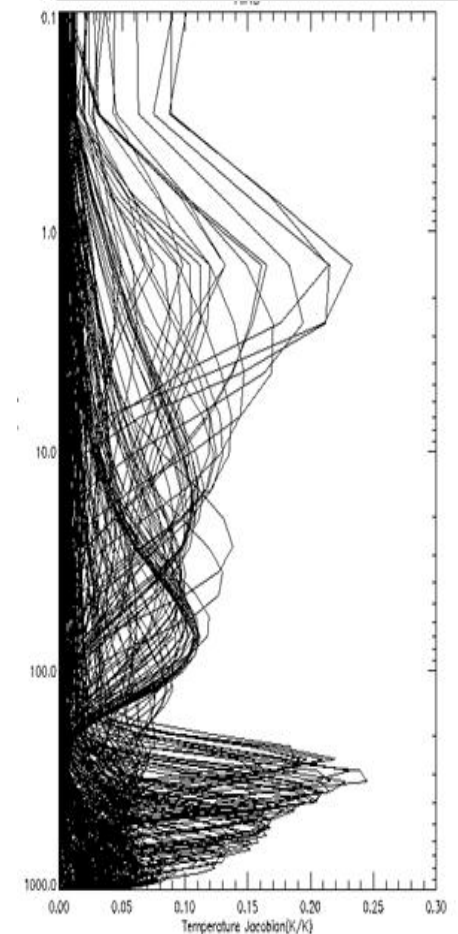

These channels are located in **window regions** of the spectrum at frequencies where the main contribution to the measured radiance is coming from the surface:


$$L_\nu = \int_0^\infty B(\nu, T(z)) \left[ \frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$

~~Surface emission~~ + ~~Surface reflection~~ + Cloud/Rain interaction

$L(\nu) \approx B[\nu, T_{\text{surf}}] \epsilon(u, \nu)$

$T_{\text{surf}}$  = surface temperature     $\epsilon$  = surface emissivity

Used to obtain information about the surface temperature, vegetation and **surface wind** (over sea).

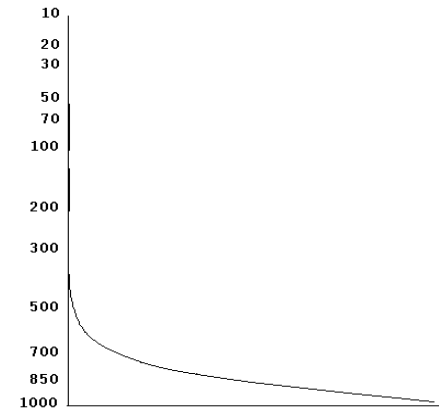

- These instruments (e.g. Scatterometers and altimeters) illuminate the earth's surface by emitting energy in **atmospheric window (VIS/NIR & MW)** regions and measure the radiance that is scattered back.


Main contribution to the measured radiance is:

$$L_\nu = \int_0^\infty \cancel{B(\nu, T(z))} \left[ \frac{d\tau(\nu)}{dz} \right] dz + \cancel{\text{Surface emission}} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$


- Provide information on surface winds, waves (**over sea**) and soil moisture (**over land**),

## Hurricane Gustave (31/08/2008) captured by ASCAT



ASCAT: 20080831 15:30Z HIRLAM: 2008083109+6 lat lon: 29.83 -86.55 IR: 16:00  
30°W 85°W

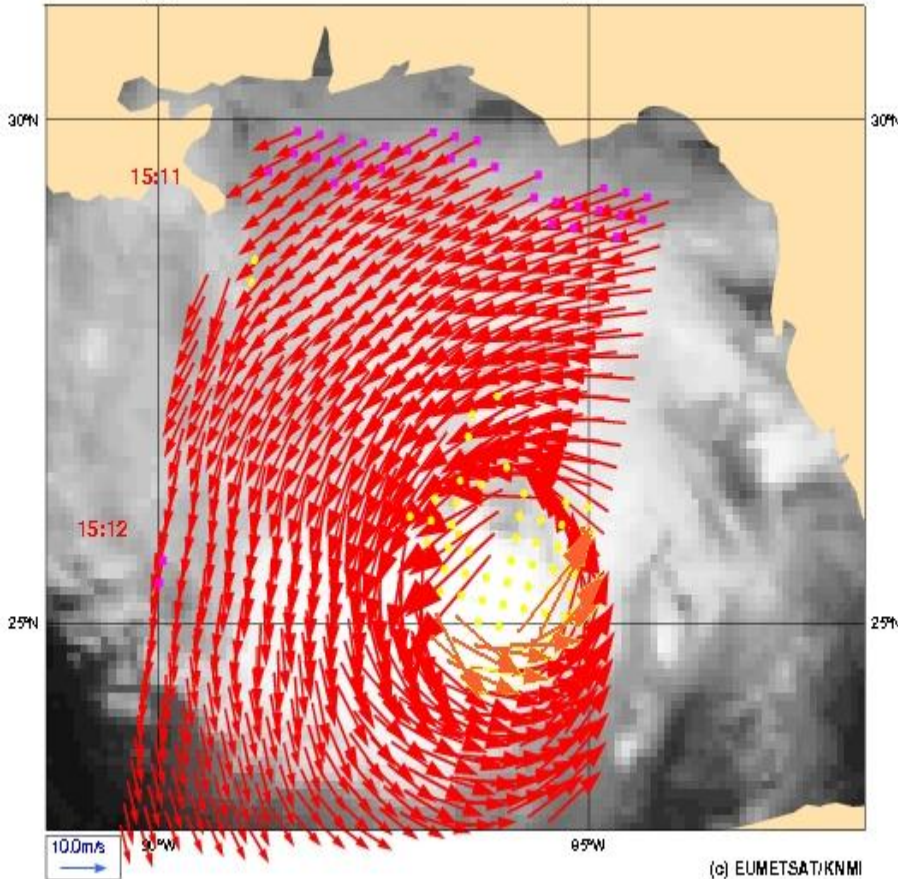


ASCAT: 20080901 02:30Z GOES lat lon: 26.27 -84.45 IR: 03:00  
85°W 80°W

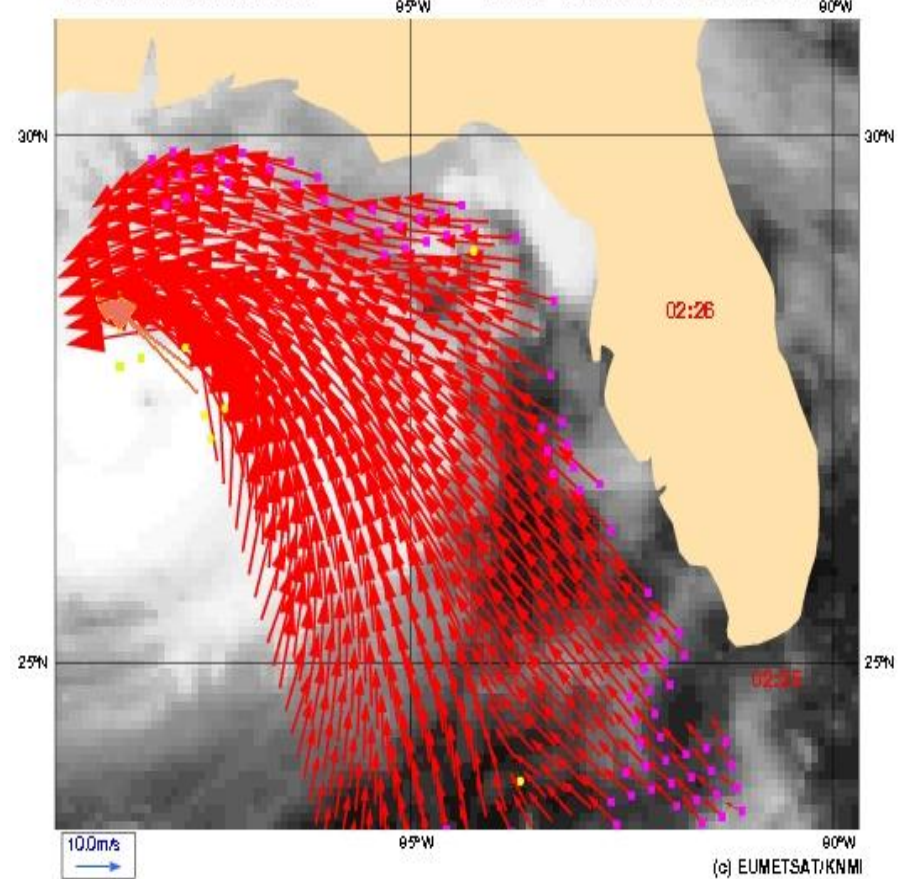


- The impact of the atmosphere on the radio signal propagation depends on the refractivity
- Receivers on LEOs record quasi-vertical profiles of the atmosphere (ionosphere and neutral) including :
  - **Bending angle >>**
  - **Refractivity >>**
  - **(Temperature, humidity)**

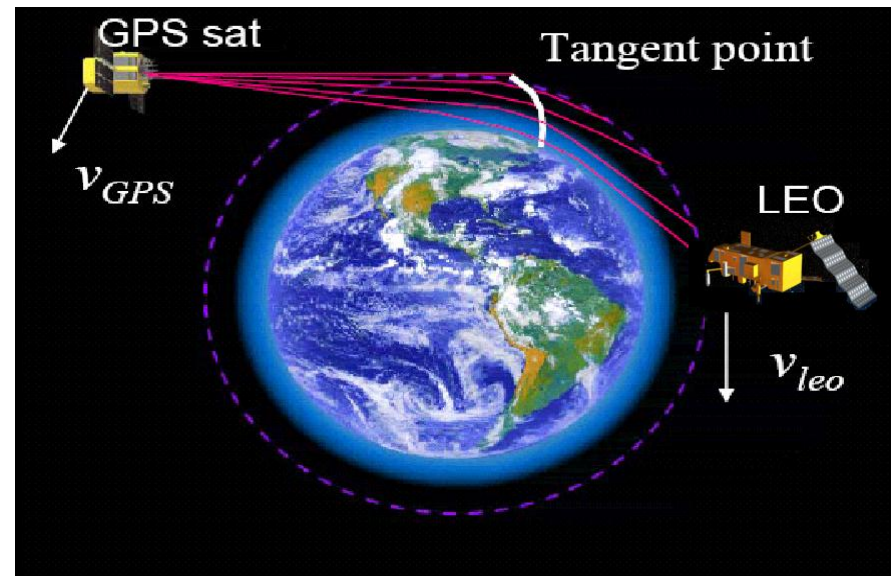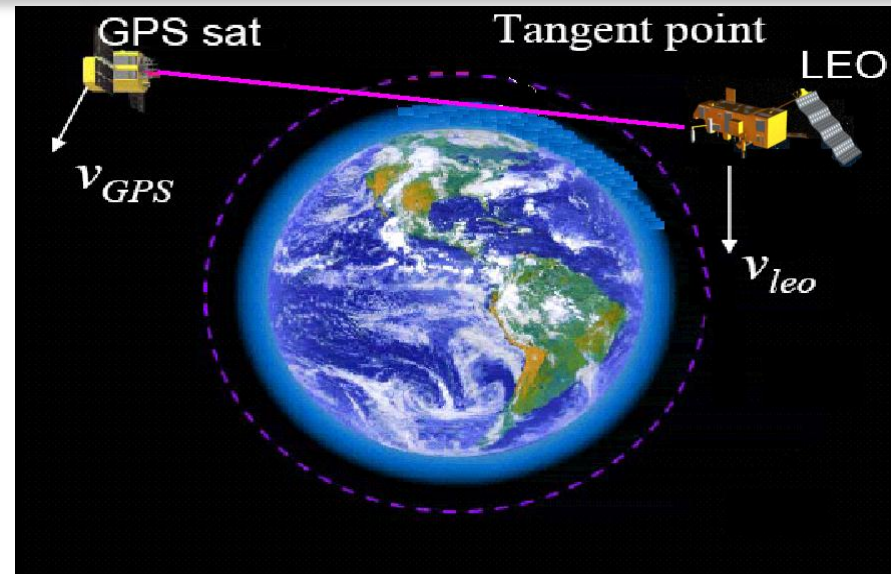


- High vertical resolution ( $\sim 1$  km),
- Good horizontal coverage,
- High stability in time
- All weather sensing capability (not affected by cloudy or rainy conditions),

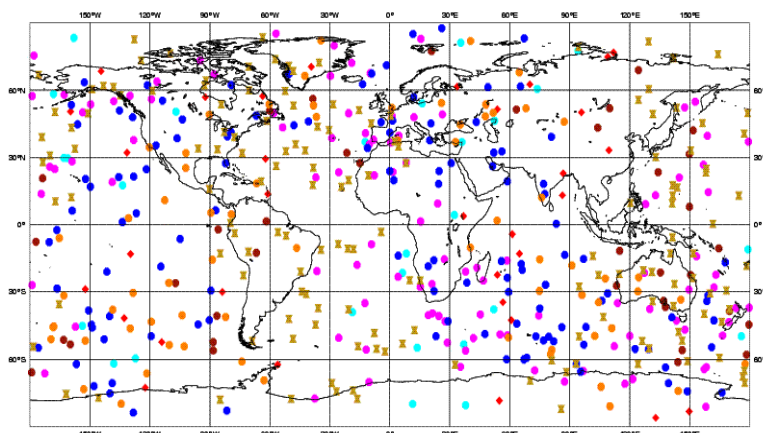

Level 1 Product

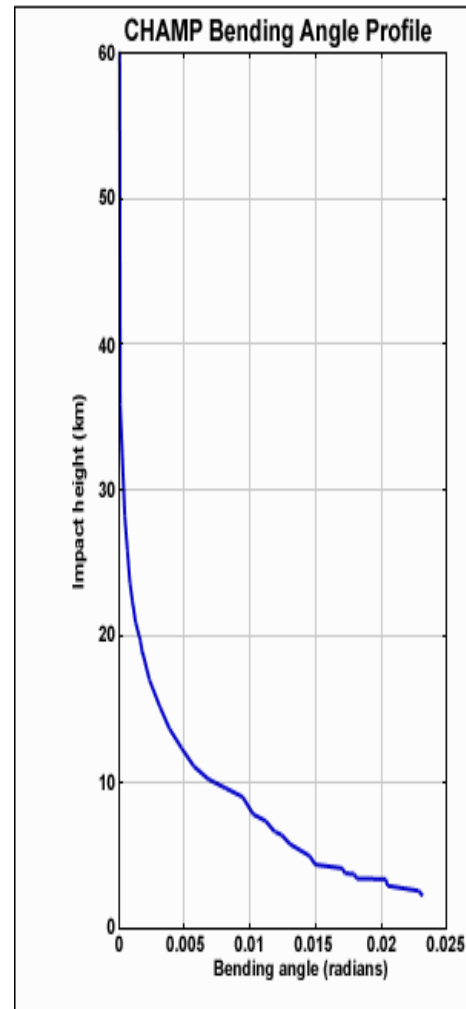

Level 2 Product

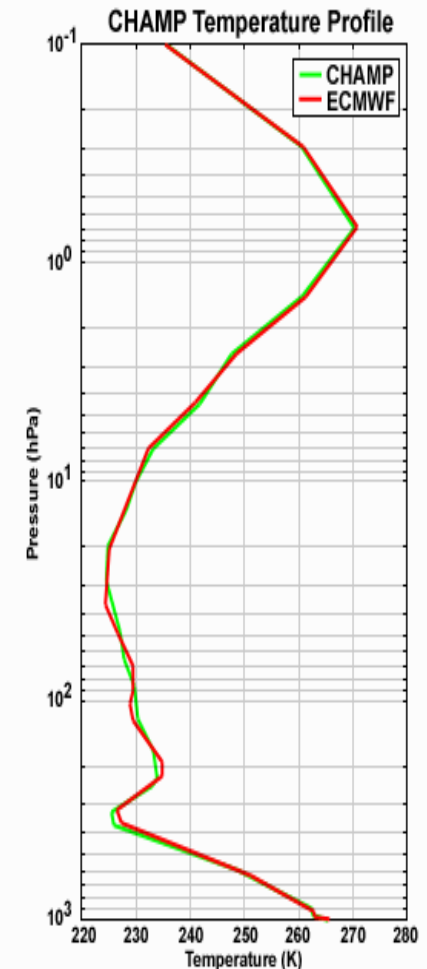

Juha-Pekka Luntama, EUMETSAT

Picture from Eumetsat website

Instruments	Plateforme
HIRS (Infrared)	NOAA series, METOP
AMSU-A, AMSU-B/MHS (microwave)	NOAA, METOP-A, METOP-B, AQUA
IASI (Infrared)	METOP-A
AIRS (Infrared)	AQUA
GPSRO	CHAMP, GRACE-A, COSMIC series, METOP-A, METOP-B, TERRA-SARX
SSM/I, SSMIS (microwave), TMI, WINDSAT	DMSP series, TRMM, WINDSAT
MODIS (AMVs)	AQUA, TERRA
Scatterometer (surface winds, soil moisture)	METOP-A/ASCAT
Altimeter (surface winds, waves)	Jason, Envisat
Sciamachy, SBUV, OMI, GOME-2, SEVIRI and GOMOS (Ozone)	Envisat, NOAA, AURA, MSG, ERS, METOP
Imaging instruments (Radiances & derived AMVs)	METEOSAT, MSG, GEOS, MTSAT




- ① Overview of data sources
- ② Why satellite data important ?
- ③ Principals of satellite measurements
- ④ Satellite data usage at NWP**
- ⑤ Monitoring of satellite data


# Satellite data usage at NWP

- At ECMWF, satellite data are principally used by the assimilation systems (4D-Var, Wave OI) to define the initial conditions for the forecast model,
- Satellite data amounts to 99% in screening and 95% in assimilation.
- Radiance data dominates assimilation with 90%.
- Relative GPSRO (limb) data amount strongly increases between screening and assimilation while ozone data is largely reduced.


**Screening**  
24/04/2008 00UTC

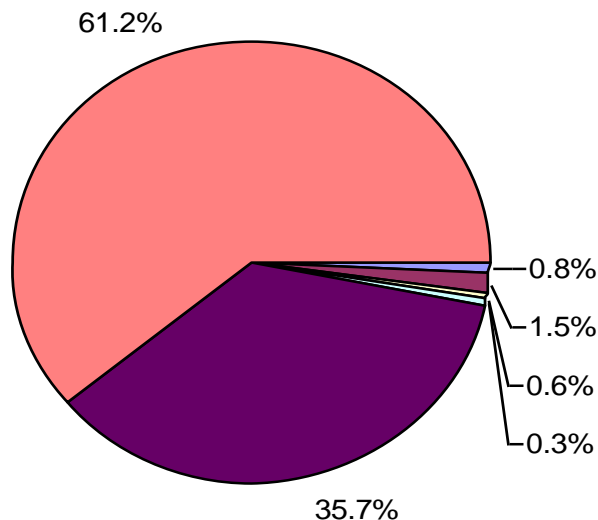


**Assimilation**  
24/04/2008 00UTC

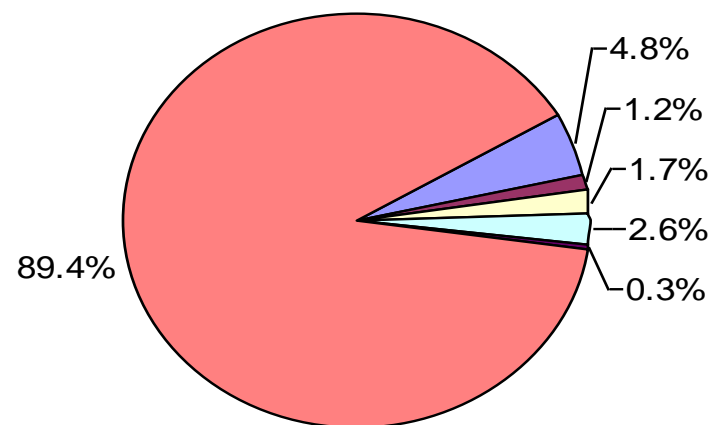


From P. Bauer

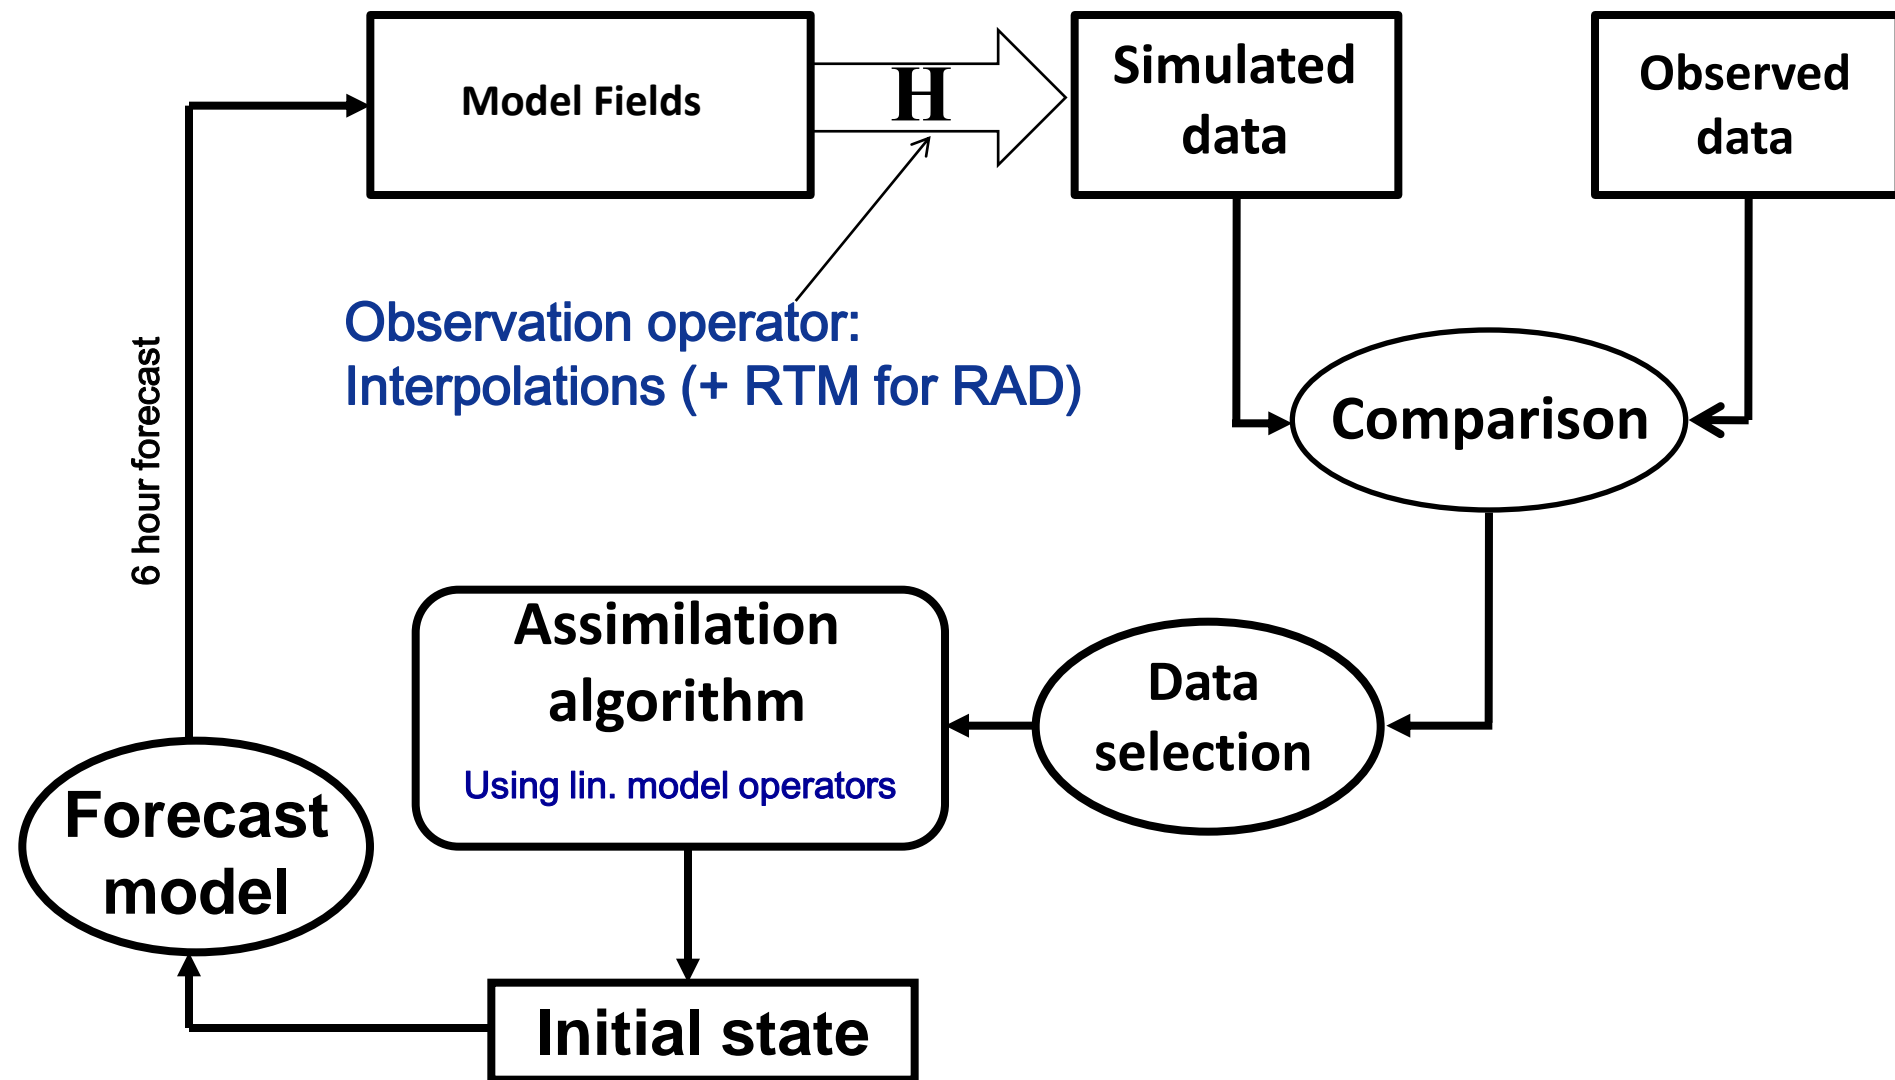

Met-8 IR (Observations)

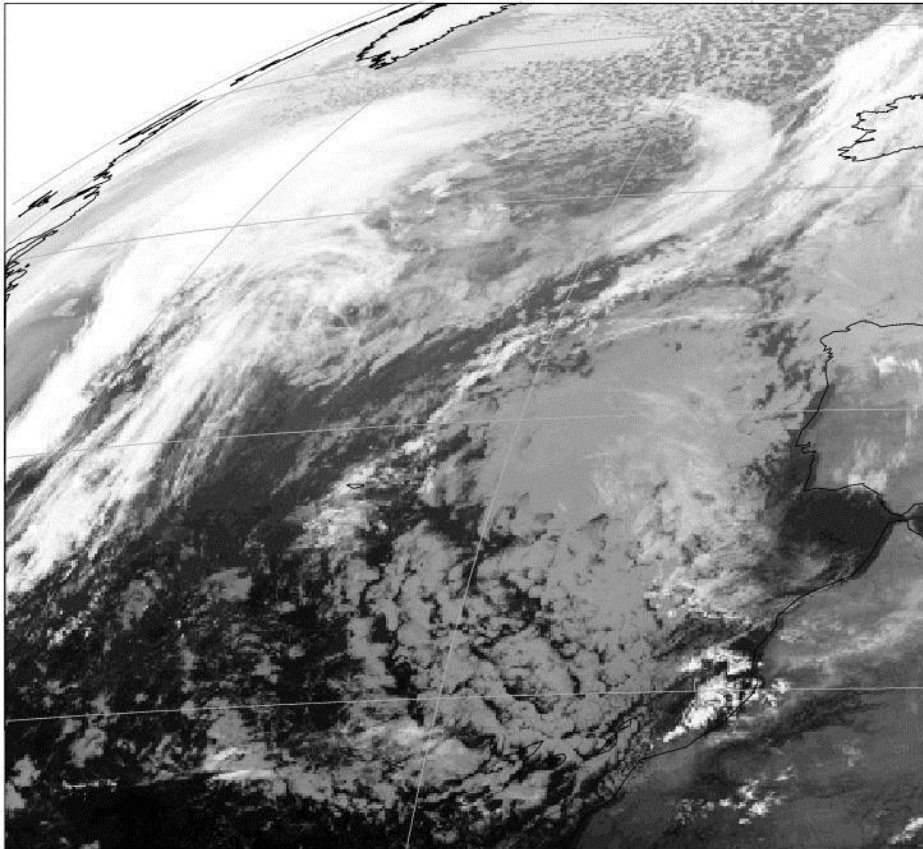

Met-8 IR (from the model)

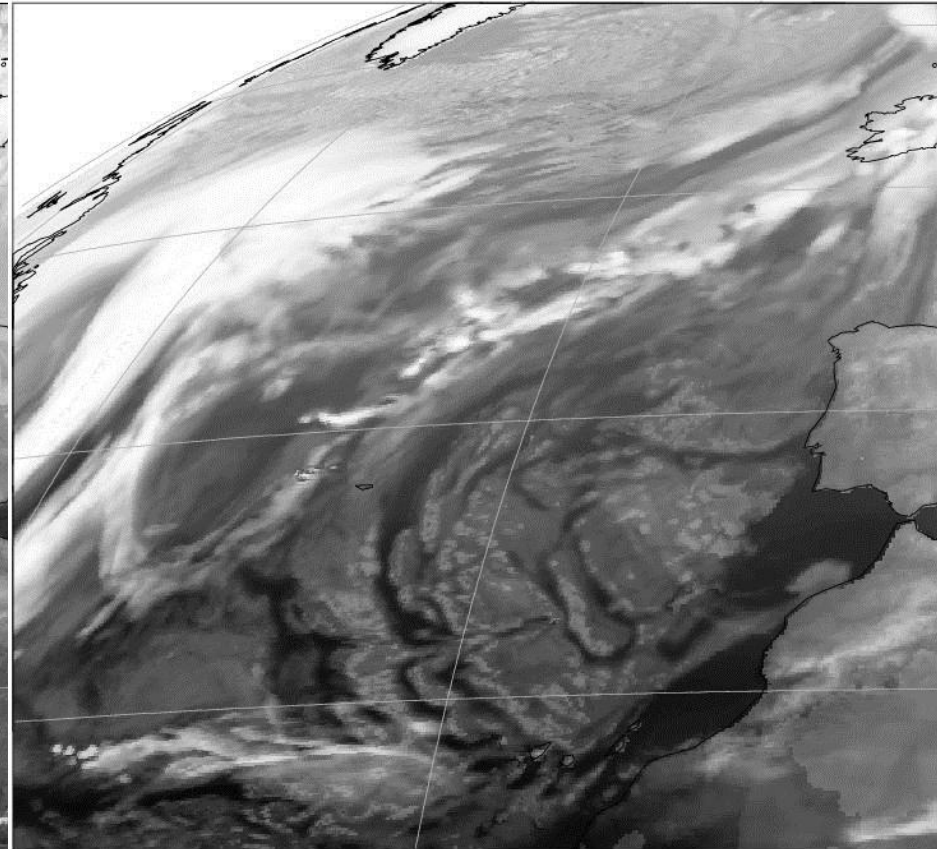

- ① Overview of data sources
- ② Why satellite data important ?
- ③ Principals of satellite measurements
- ④ Satellite data usage at NWP
- ⑤ Monitoring of satellite data**

- Data monitoring is a crucial component of the data assimilation diagnostic system. It allows the control of the availability, the quality and the impact of the observing system.
- Data monitoring can help diagnosing model problems.
- Monitoring outputs are important to define and evaluate the data usage
- Data monitoring consists of the production of statistics over large data samples. Statistics are generally computed for quantities related to the data assimilation
- Data monitoring tools allow investigating the data from various perspectives.


- In the daily model monitoring (analysis, increments, forecasts, ...), it's generally not easy to spot the impact of satellite data,
- However, any important degradation of the quality or the availability of satellite data may affect, few days later, the quality of the forecasts.
- It's crucial to report any change in data quality or availability. This is important to trigger corrective actions (blacklisting, ....),

### Statistics for Radiances from Aqua / AIRS

Channel = 2104, All Data

Area: lon\_w= 0.0, lon\_e= 360.0, lat\_n= -70.0, lat\_s= -90.0 (over sea)

EXP = 0001

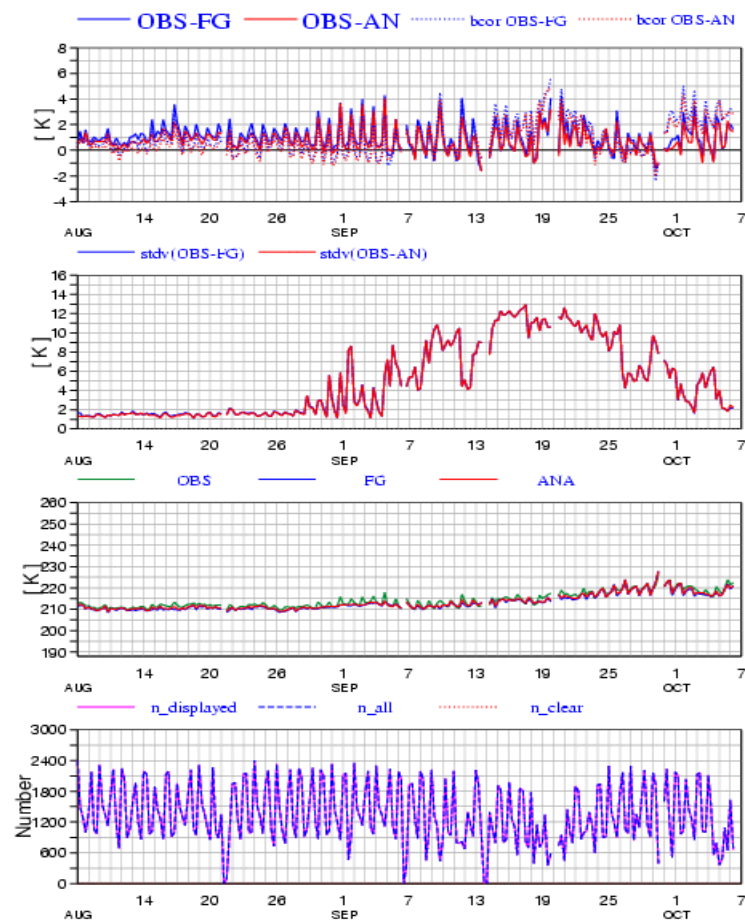


Time evolution of statistics over predefined areas/surfaces/flags



Time evolution of statistics  
of zonal means or levels  
means

STATISTICS FOR RADIANCES FROM AQUA / AIRS  
STDV OF FIRST GUESS DEPARTURES (OBS-FG) [ K ] (CLEAR)  
CHANNEL = 2104  
EXP = 0001, DATA PERIOD = 2008080800 - 2008100700  
Min: 0 Max: 21.206 Mean: 3.6350

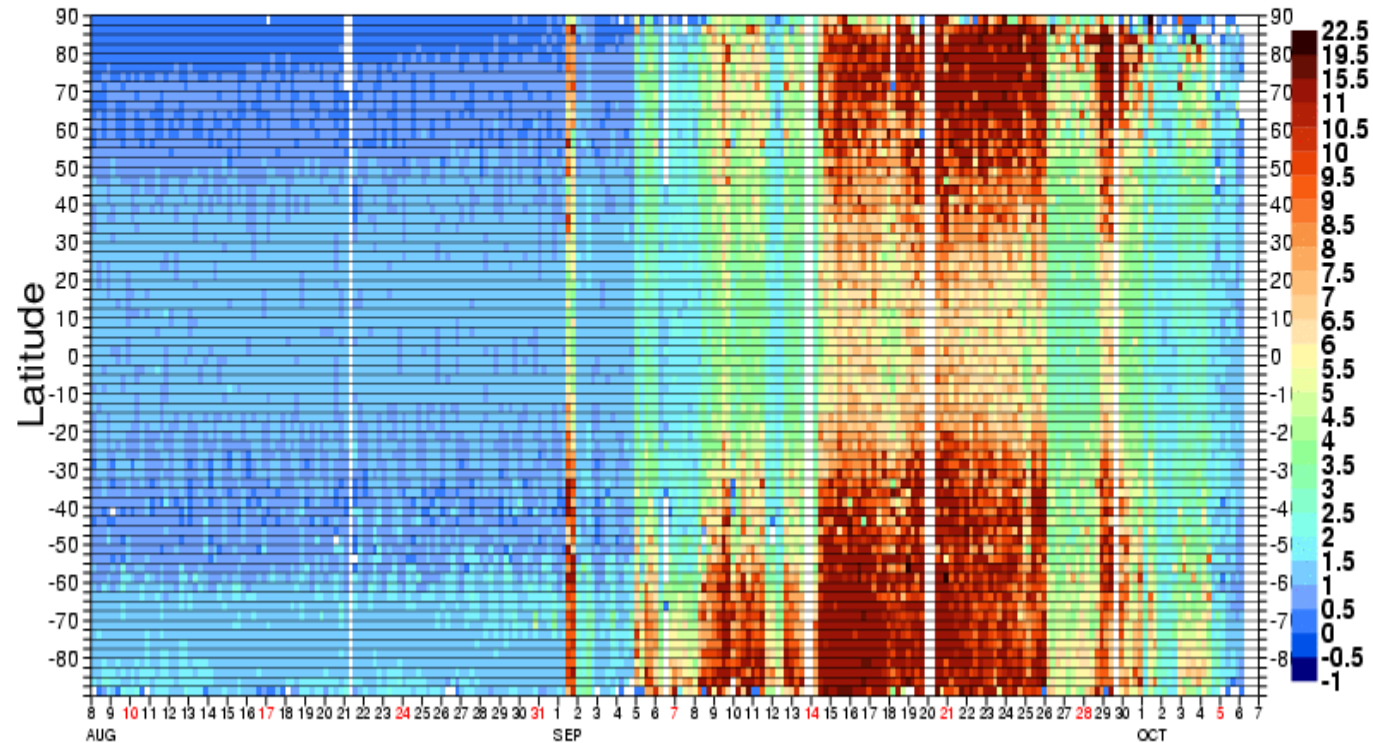


### Time series compact product for high spectral resolution sounders

Increase of the noise of AIRS channel 2104



When a problem is spotted, individual time series and Hovmöller diagrams can be checked.

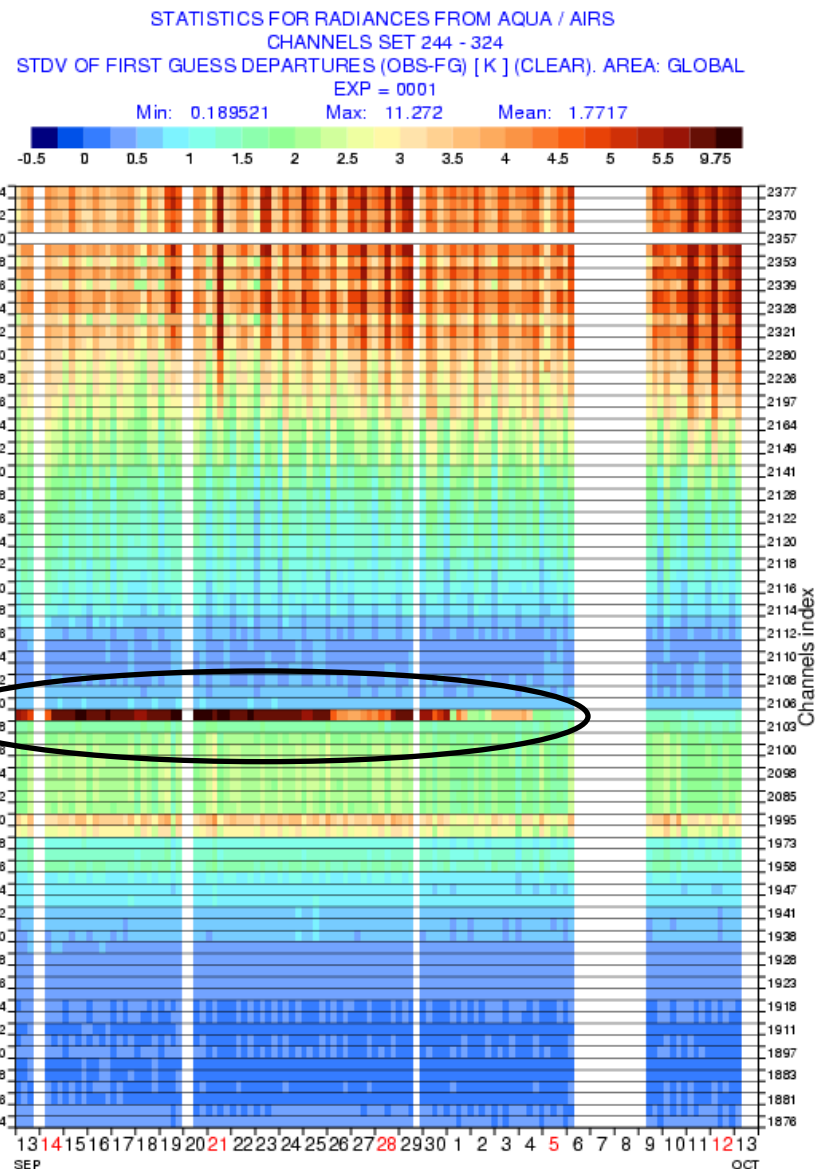


Time evolution of statistics for several channels



Useful for quick and routine verifications




Can not be used for high spectral resolution sounders

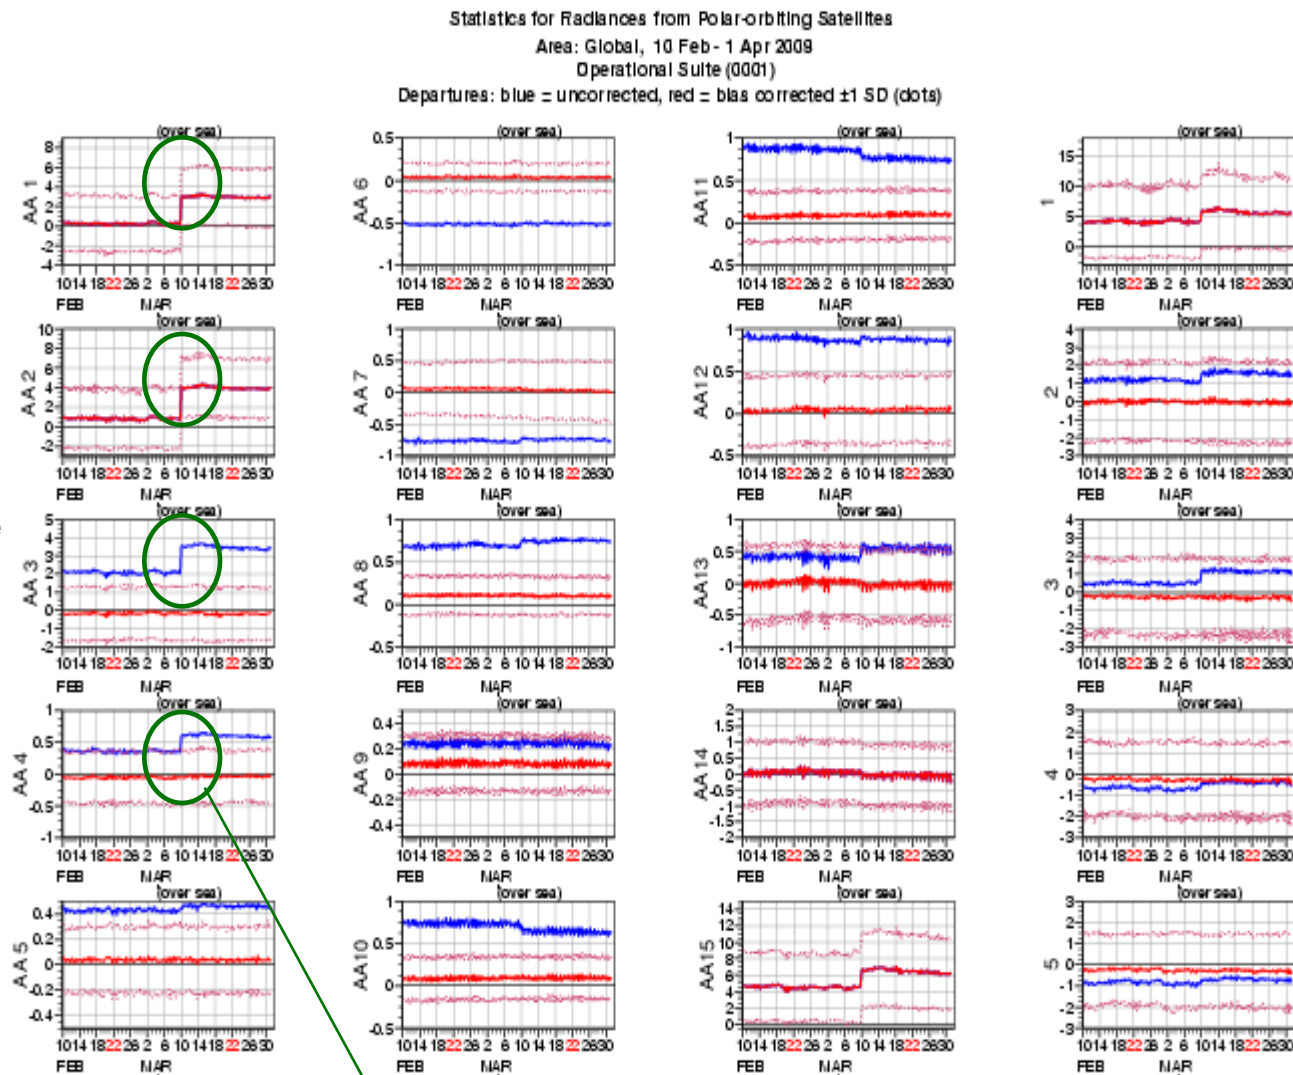


RTM version upgrade

### Assessment of the geographical variability of statistics:

- location effect
- air mass effect

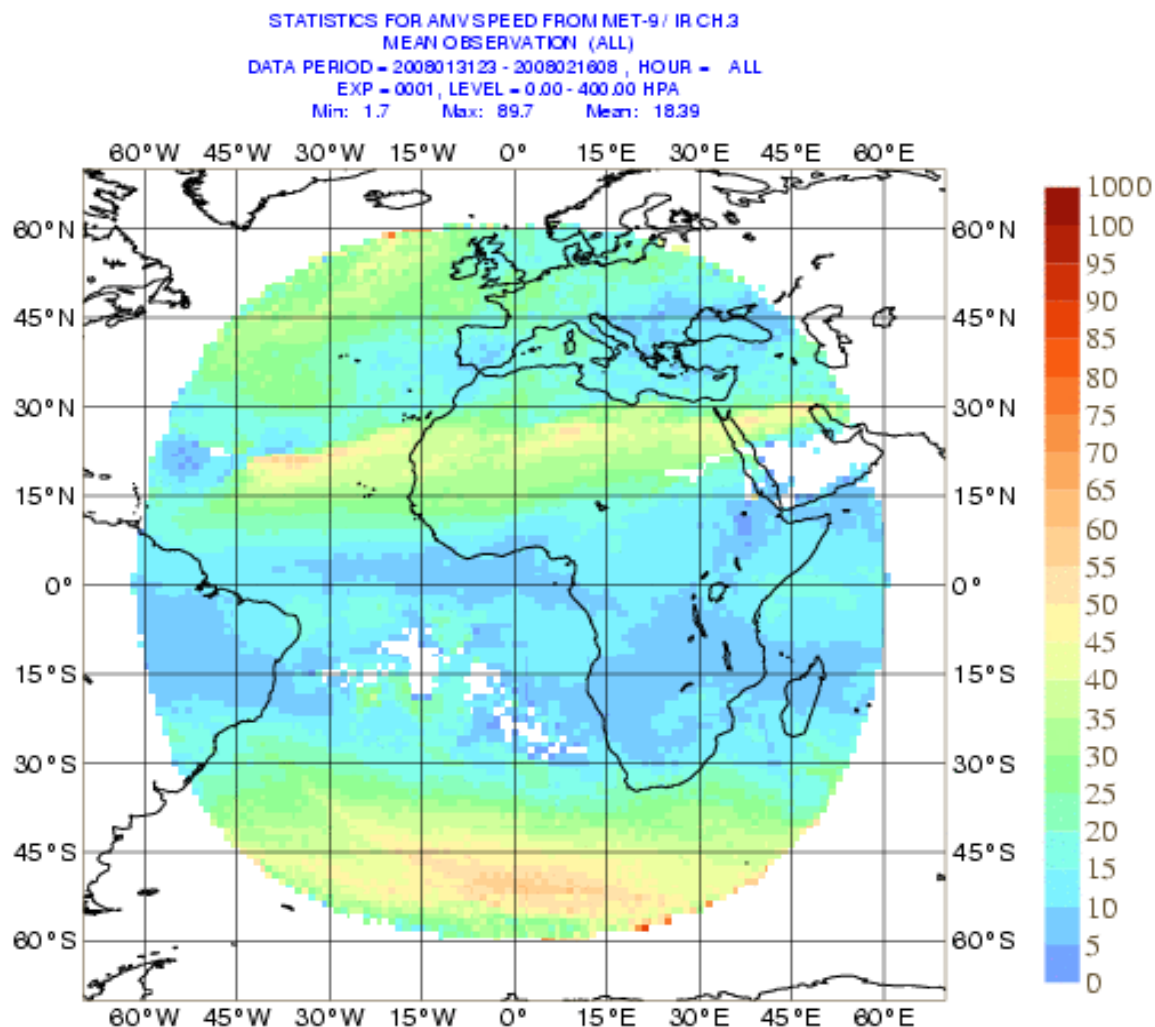


**comprehensive way to compare  
observed values against model  
ones**

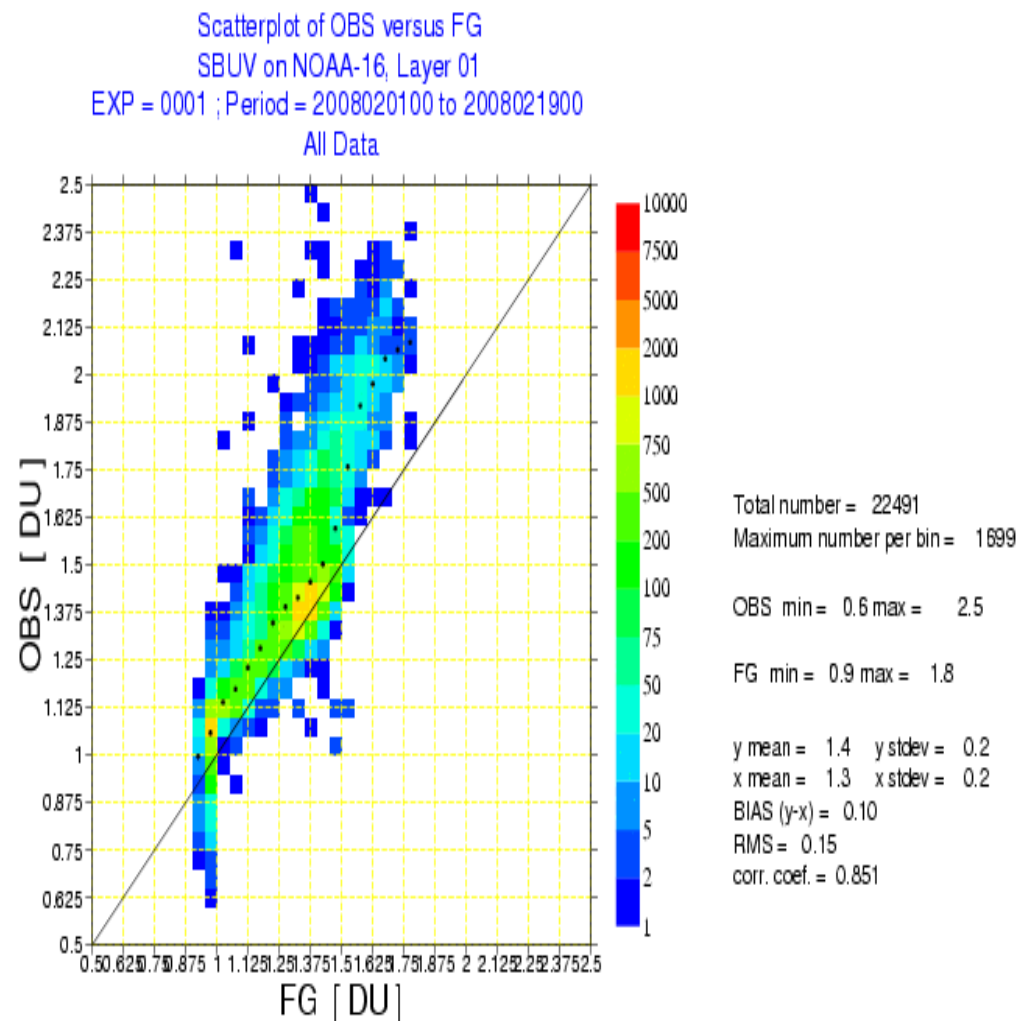

Selected statistics are checked against an expected range.

E.g., global mean bias correction for GOES-12 (in blue):

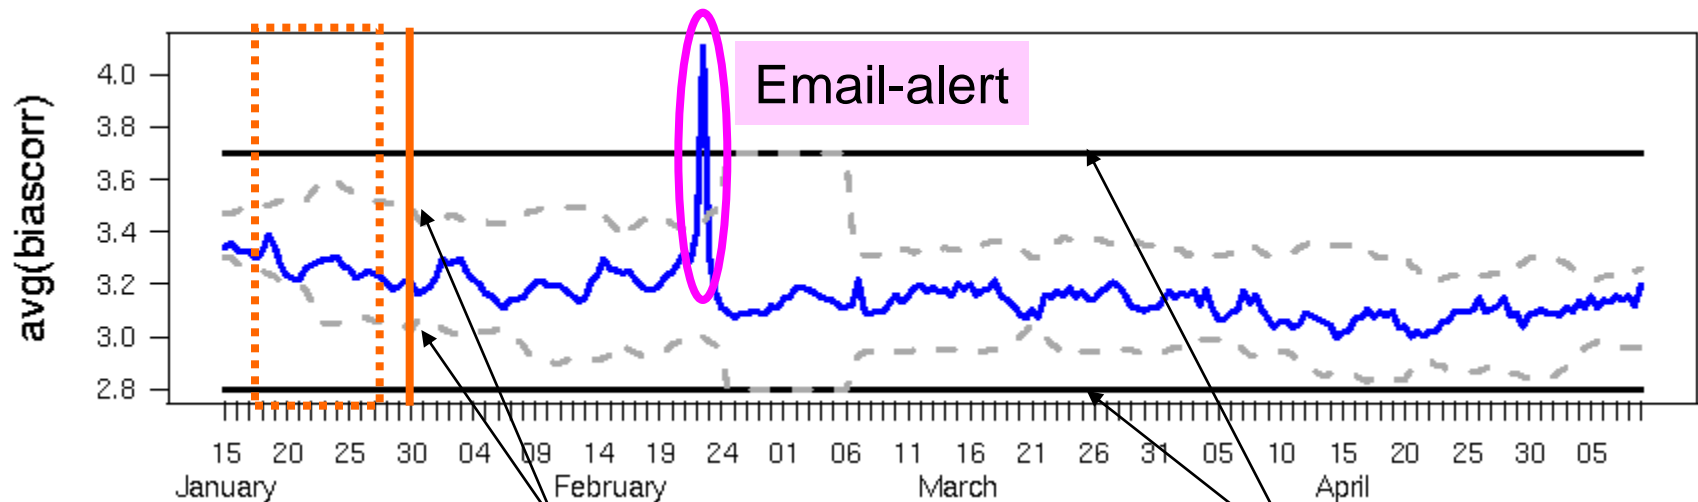

Soft limits (mean  $\pm$  5 stdev of statistic to be checked, calculated from past statistics over a period of 20 days, ending 2 days earlier)

Hard limits (fixed)



[Home](#) [Your Room](#) [Login](#) [Contact](#) [Feedback](#) [Site Map](#) Search:

[About Us](#) [Products](#) [Services](#) [Research](#) [Publications](#) [News&Events](#)  
Overview Forecasts Computing Modelling Newsletters Calendar  
Getting here Order Data Archive Reanalysis Manuals Employment  
Committees Order Software Prep.IFS Seasonal Library Open Tenders

[Home](#) > [Products](#) > [Forecasts](#) > Satellite Data Automatic Checking


## Satellite Data Automatic Checking

### Products

[Forecasts](#)  
[Data and Software](#)  
[Ordering](#)  
[Catalogue](#)  
[GTS Products](#)  
[Operational](#)  
[Upgrades](#)

An experimental automatic satellite data checking system has been implemented recently at ECMWF. It triggers the production of alarm messages if an anomaly is detected in the quality or the availability of the satellite data assimilated by the model.

Selected statistical parameters (number of observations, bias correction, and mean bias-corrected background and analysis departures) are checked against an expected range. An appropriate alert message (including a time series plot) is generated if statistics are outside the specified ranges. A severity level (slight, considerable, severe) is assigned to each message depending on how far statistics are from the expected values. Two kinds of ranges are used by the automatic checking: Soft and Hard limits. Soft limits are updated automatically using statistics from the last twenty days (extremes are excluded during this process). Hard limits are adjusted manually when required.

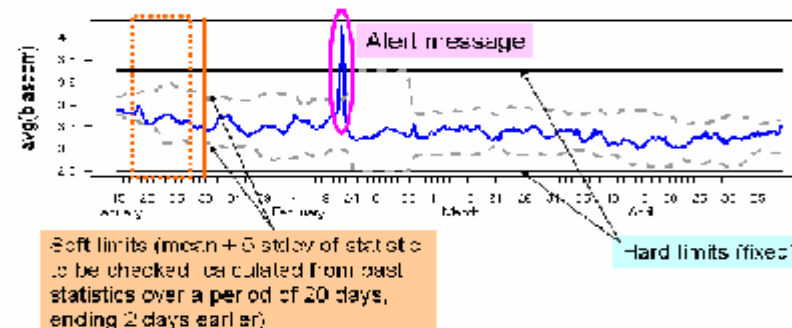

Currently, the automatic checking is limited to data passing through the minimisation process (including VarBC passive data). It's being applied, twice a day, to the long cut-off 4D-VAR cycles (DCDA).

- [Experimental Satellite Data Checking for 2008110412 DCDA](#)
- [Experimental Satellite Data Checking for 2008110400 DCDA](#)

When statistics from independent data types show a consistent jump it's most likely due to model problems:

**Stratosphere:** Microwave and Infrared data from various satellites.

**Troposphere:** Microwave and Infrared radiances from various satellite

**Surface:** Microwave and scatterometer data from various satellites.



Early January 2013, the automatic alarm system generated severe alarms associated to an increase of the noise for infrared and microwave stratospheric peaking channels

Checking 0001 DCDA 2013010212

=====

AQUA AIRS 56 radiances : out of range:

(3 times in last 10 days for at least one item)

[http://www.ecmwf.int/products/forecasts/satellite\\_check//do/get/satcheck/3215/110485?showfile=true](http://www.ecmwf.int/products/forecasts/satellite_check//do/get/satcheck/3215/110485?showfile=true)

**Severely:**    **stdev(fg\_depar)=0.777,**                      **expected range: 0.57 0.68**

**Slightly:**    **avg(biascorr)=-0.02000005,**                      **expected range: -0.37 -0.05(H)**


METOP-A IASI 89 radiances : out of range:

(6 times in last 10 days for at least one item)


[http://www.ecmwf.int/products/forecasts/satellite\\_check//do/get/satcheck/3217/111259?showfile=true](http://www.ecmwf.int/products/forecasts/satellite_check//do/get/satcheck/3217/111259?showfile=true)



**Severely:**    **stdev(fg\_depar)=0.459,**                      **expected range: 0.33 0.41**

AQUA AIRS 56 radiances  
Active data, EXP=0001  
airs\_784\_11\_56\_210

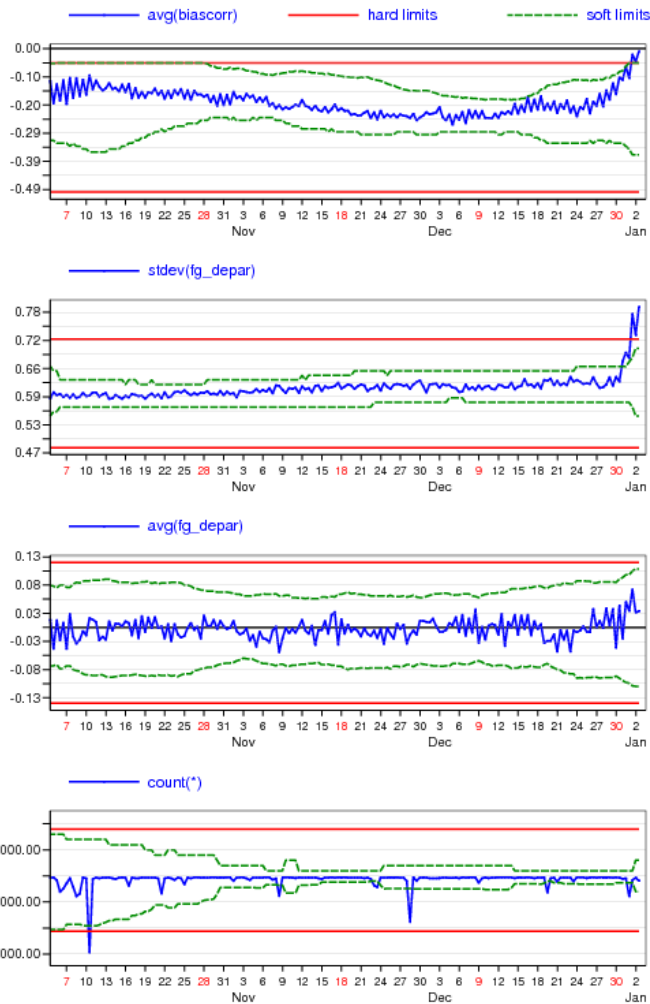

Statistics for RADIANCES from METOP-A/AMSUA (Global)  
Channel = 13 [ time step = 6 hours ]  
STDV OF FIRST GUESS DEPARTURE (OBS-FG) , All  
EXP = 0001, Data Period = 2012111421 - 2013010403  
Min: 0.436 Max: 3.487 Mean: 0.595

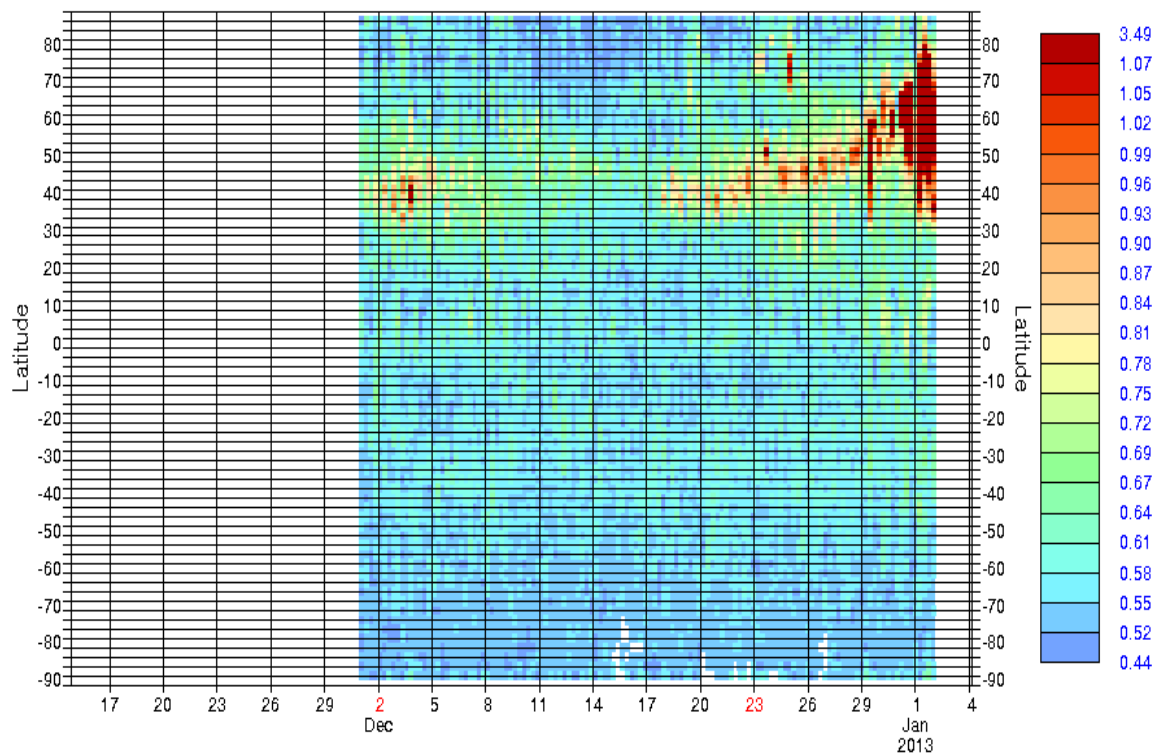

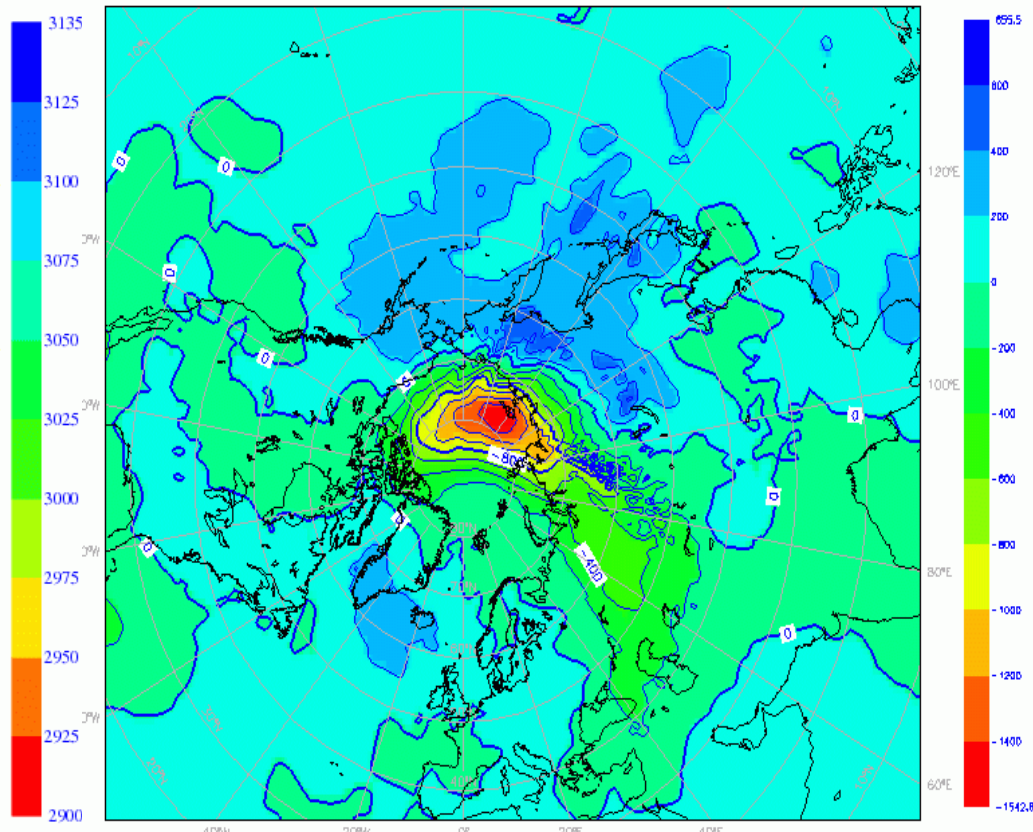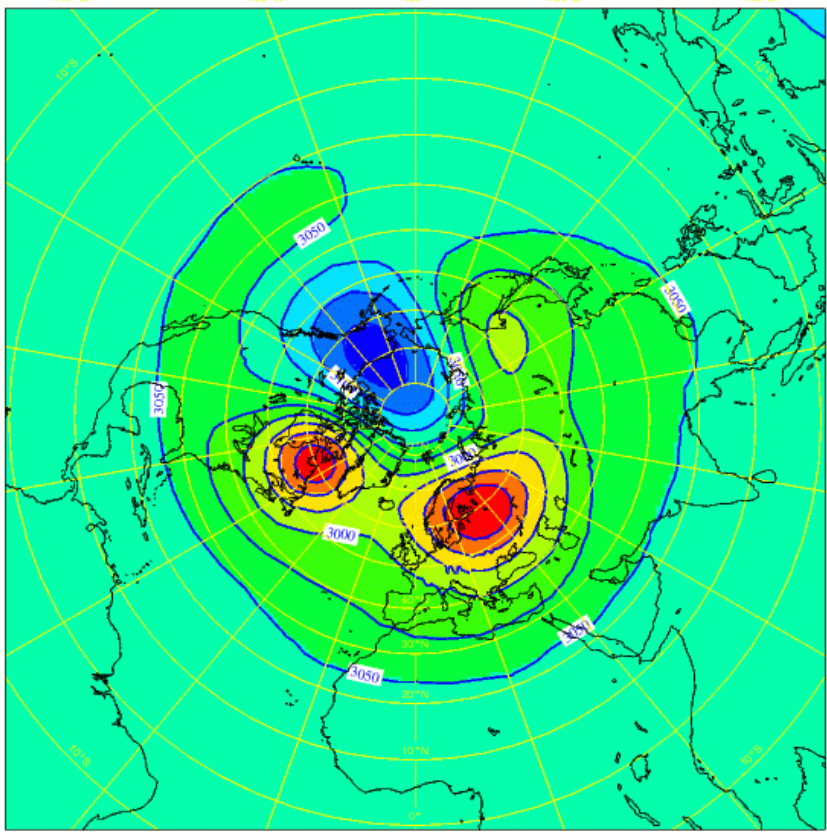

**The increase of the noise is due to the onset of the polar vortex breaking out process (SSW). The model predicted the onset of the process but not accurately in the beginning. A lot of data failed the QC check and delayed the model recovery.**

**The SSW was a clear indication that a cold spell will hit Europe one to two weeks later.**

- ECMWF newsletter articles

<http://www.ecmwf.int/publications/newsletters/>

- Spring 2003: “Assimilation of high-resolution satellite data.”
- Spring 1999: “The use of raw TOVS/ATOVS radiances in the ECMWF 4D-Var assimilation system”

- ECMWF Technical Memoranda

<http://www.ecmwf.int/publications/library/do/references/list/14>

- TM 345: “An improved general fast radiative transfer model for the assimilation of radiance observations”,

- ECMWF monitoring web site

<http://www.ecmwf.int/products/forecasts/d/charts/monitoring/satellite>

# Thank you for your attention